



# XR-DV526 U

# SERVICE MANUAL

---

DVD / STEREO CASSETTE RECEIVER

BASIC TAPE MECHANISM : ZZM-3 YPR1NF  
BASIC DVD MECHANISM : AZG-D ZAAPA

---

- Replace this Service Manual with "Revision Publishing" when it is issued.

# aiwa

S/M Code No. 09-007-434-1T1

SIMPLE

DATA

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	ACCESSORY		87-006-225-010	1D	ANT,LOOP ANT NC2	US	CX-NDV526
O	ACCESSORY		87-043-115-010	1A	FEEDER-ANT,FM	US	CX-NDV526
O	ACCESSORY		87-050-103-010	1B	CORD,PIN 1PY1.5M	US	CX-NDV526
O	ACCESSORY		8A-DJV-701-010	--	RC UNIT,RC-AAS03	US	CX-NDV526
X	AMP 1F	*	8A-NF6-650-210	1C	PWB,AMP 1F 2M	US	CX-NDV526
O	AMP 1F	C 0101	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0102	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0103	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0104	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0107	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0108	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0111	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0112	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0113	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0114	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0115	87-A12-180-080	0E	CAP,E 10-63 M 105 KME	US	CX-NDV526
O	AMP 1F	C 0116	87-A12-180-080	0E	CAP,E 10-63 M 105 KME	US	CX-NDV526
O	AMP 1F	C 0119	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0120	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0133	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
O	AMP 1F	C 0153	87-010-188-080	0E	C-CAP,S 6800P-50 K B C2012	US	CX-NDV526
O	AMP 1F	C 0201	87-A10-300-080	0E	CAP,M 0.027-50 J	US	CX-NDV526
O	AMP 1F	C 0202	87-A10-300-080	0E	CAP,M 0.027-50 J	US	CX-NDV526
O	AMP 1F	C 0203	87-A10-300-080	0E	CAP,M 0.027-50 J	US	CX-NDV526
O	AMP 1F	C 0204	87-A10-300-080	0E	CAP,M 0.027-50 J	US	CX-NDV526
O	AMP 1F	C 0205	87-010-180-080	0E	C-CAP,S 1500P-50 K B C2012	US	CX-NDV526
O	AMP 1F	C 0206	87-010-180-080	0E	C-CAP,S 1500P-50 K B C2012	US	CX-NDV526
O	AMP 1F	C 0207	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0208	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0209	87-010-187-080	0E	C-CAP,S 5600P-50 K B	US	CX-NDV526
O	AMP 1F	C 0210	87-010-187-080	0E	C-CAP,S 5600P-50 K B	US	CX-NDV526
O	AMP 1F	C 0211	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0212	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0215	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0216	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 1F	C 0217	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0218	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0221	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0222	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 1F	C 0223	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0224	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0251	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 1F	C 0252	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 1F	C 0253	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 1F	C 0254	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 1F	C 0259	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0260	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 1F	C 0401	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
! O	AMP 1F	CN 0101	87-A61-011-010	0E	CONN,13P H BLK TAC-L13P-A3	US	CX-NDV526
! O	AMP 1F	CN 0102	87-A61-011-010	0E	CONN,13P H BLK TAC-L13P-A3	US	CX-NDV526
! O	AMP 1F	CN 0105	87-099-198-010	0E	CONN,10P V BLK 6216	US	CX-NDV526
! O	AMP 1F	CNA0101	8A-NF8-656-010	1A	CONN ASSY,5P TID-A 400	US	CX-NDV526
! O	AMP 1F	CNA0103	8A-NF8-655-010	1A	CONN ASSY,7P TID-A(250)	US	CX-NDV526
S	AMP 1F	D 0101	87-A40-269-080	0E	C-DIODE,MC2836	US	CX-NDV526
S	AMP 1F	D 0102	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	AMP 1F	D 0103	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	AMP 1F	D 0150	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	AMP 1F	D 0201	87-A40-269-080	0E	C-DIODE,MC2836	US	CX-NDV526
S	AMP 1F	D 0203	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	AMP 1F	D 0204	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 1F	D 0401	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	AMP 1F	D 0402	87-A40-553-080	0E	DIODE,1N4003 LES	US	CX-NDV526
S	AMP 1F	D 0403	87-A40-553-080	0E	DIODE,1N4003 LES	US	CX-NDV526
! S	AMP 1F	IC 0101	87-A21-398-010	2A	IC,STK490-110	US	CX-NDV526
! S	AMP 1F	IC 0201	87-A21-396-010	1H	IC,STK490-040	US	CX-NDV526
O	AMP 1F	J 0202	87-A61-158-010	1A	JACK,PIN 2P R/W/BL H(SEPA) KM	US	CX-NDV526
X	AMP 1F	JR 0101	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 1F	JR 0103	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 1F	JR 0104	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 1F	JR 0105	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526

## PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X AMP	1F	JR 0106	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0107	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0115	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X AMP	1F	JR 0201	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X AMP	1F	JR 0203	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0204	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0205	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0206	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0207	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X AMP	1F	JR 0208	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X AMP	1F	JR 0401	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O AMP	1F	L 0251	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
O AMP	1F	L 0252	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
S AMP	1F	Q 0101	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S AMP	1F	Q 0102	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S AMP	1F	Q 0150	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S AMP	1F	Q 0151	87-A30-106-040	0E	C-TR,CMBT5551	US	CX-NDV526
S AMP	1F	Q 0201	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S AMP	1F	Q 0202	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S AMP	1F	Q 0203	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S AMP	1F	Q 0204	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S AMP	1F	Q 0401	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S AMP	1F	Q 0402	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X AMP	1F	R 0101	88-118-683-080	0E	C-RES,S 68K-1/10W J	US	CX-NDV526
X AMP	1F	R 0102	88-118-683-080	0E	C-RES,S 68K-1/10W J	US	CX-NDV526
X AMP	1F	R 0103	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X AMP	1F	R 0104	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X AMP	1F	R 0105	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X AMP	1F	R 0106	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X AMP	1F	R 0109	88-118-681-080	0E	C-RES,S 680-1/10W J	US	CX-NDV526
X AMP	1F	R 0110	88-118-681-080	0E	C-RES,S 680-1/10W J	US	CX-NDV526
X AMP	1F	R 0111	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X AMP	1F	R 0112	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X AMP	1F	R 0121	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X AMP	1F	R 0123	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X AMP	1F	R 0125	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X AMP	1F	R 0126	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
O AMP	1F	R 0129	87-A00-262-080	0E	RES,M/F 0.15-2W J	US	CX-NDV526
O AMP	1F	R 0130	87-A00-262-080	0E	RES,M/F 0.15-2W J	US	CX-NDV526
X AMP	1F	R 0133	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X AMP	1F	R 0134	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X AMP	1F	R 0135	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X AMP	1F	R 0136	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X AMP	1F	R 0137	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X AMP	1F	R 0138	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X AMP	1F	R 0141	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X AMP	1F	R 0142	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X AMP	1F	R 0143	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X AMP	1F	R 0144	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X AMP	1F	R 0145	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X AMP	1F	R 0146	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X AMP	1F	R 0150	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0151	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X AMP	1F	R 0152	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0153	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0154	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0171	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X AMP	1F	R 0172	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X AMP	1F	R 0201	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X AMP	1F	R 0202	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X AMP	1F	R 0205	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0206	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X AMP	1F	R 0207	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X AMP	1F	R 0208	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X AMP	1F	R 0209	88-118-184-080	0E	C-RES,S 180K-1/10W J	US	CX-NDV526
X AMP	1F	R 0210	88-118-184-080	0E	C-RES,S 180K-1/10W J	US	CX-NDV526
X AMP	1F	R 0211	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X AMP	1F	R 0212	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X AMP	1F	R 0213	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X AMP	1F	R 0214	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	AMP 1F	R 0215	88-128-101-080	0E	C-RES, 100-1/8W J	US	CX-NDV526
X	AMP 1F	R 0216	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 1F	R 0217	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0218	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0219	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0220	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0221	88-118-182-080	0E	C-RES,S 1.8K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0222	88-118-182-080	0E	C-RES,S 1.8K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0223	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 1F	R 0224	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 1F	R 0227	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 1F	R 0228	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
O	AMP 1F	R 0231	87-A00-258-080	0E	RES,M/F 0.22-1W J	US	CX-NDV526
O	AMP 1F	R 0232	87-A00-258-080	0E	RES,M/F 0.22-1W J	US	CX-NDV526
X	AMP 1F	R 0233	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0234	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0235	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0236	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0237	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 1F	R 0238	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 1F	R 0239	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0240	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0241	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0242	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0245	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0246	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0251	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	AMP 1F	R 0252	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	AMP 1F	R 0253	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0254	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0255	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	AMP 1F	R 0256	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	AMP 1F	R 0260	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0261	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0262	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0264	88-118-271-080	0E	C-RES,S 270-1/10W J	US	CX-NDV526
X	AMP 1F	R 0271	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0272	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0401	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0402	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0403	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0404	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	AMP 1F	R 0405	88-121-103-080	0E	RES,10K-1/8W J	US	CX-NDV526
!	AMP 1F	WH 0101	87-A90-459-010	0E	HLDR,WIRE 2.5-5P	US	CX-NDV526
!	O AMP 1F	WH 0102	87-A90-460-010	0E	HLDR,WIRE 2.5-7P	US	CX-NDV526
X	AMP 2F	*	8A-NF6-655-210	1B	PWB,AMP 2M P-LOGIC	US	CX-NDV526
O	AMP 2F	C 0101	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	AMP 2F	C 0102	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	AMP 2F	C 0103	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0104	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0105	87-010-184-080	0E	C-CAP,S 3300P-50 K B C2012	US	CX-NDV526
O	AMP 2F	C 0106	87-010-184-080	0E	C-CAP,S 3300P-50 K B C2012	US	CX-NDV526
O	AMP 2F	C 0107	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0108	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0111	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 2F	C 0112	87-010-179-080	0E	C-CAP,S 1200P-50 K B GRM	US	CX-NDV526
O	AMP 2F	C 0113	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0114	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0115	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0116	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0121	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0122	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0151	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	AMP 2F	C 0152	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	AMP 2F	C 0153	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0154	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0160	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0161	87-010-188-080	0E	C-CAP,S 6800P-50 K B C2012	US	CX-NDV526
O	AMP 2F	C 0201	87-010-183-080	0E	C-CAP,S 2700P-50 K B GRM	US	CX-NDV526
O	AMP 2F	C 0202	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	AMP 2F	C 0204	87-010-406-080	0E	CAP,E 22-50 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0205	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0206	87-A10-946-080	0E	C-CAP,S 220P-100 J CH	US	CX-NDV526
O	AMP 2F	C 0208	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	AMP 2F	C 0209	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0210	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
O	AMP 2F	C 0211	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	AMP 2F	C 0212	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	AMP 2F	C 0251	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	AMP 2F	C 0252	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	AMP 2F	C 0253	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
!	O	CN 0101	87-A61-109-010	0E	CONN,7P V TID-A	US	CX-NDV526
!	O	CN 0102	87-099-198-010	0E	CONN,10P V BLK 6216	US	CX-NDV526
S	AMP 2F	D 0101	87-A40-269-080	0E	C-DIODE,MC2836	US	CX-NDV526
S	AMP 2F	D 0102	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	AMP 2F	D 0103	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	AMP 2F	D 0160	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	AMP 2F	D 0201	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0202	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0203	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0204	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0205	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0207	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0208	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0209	87-017-495-080	0E	DIODE,1N5393	US	CX-NDV526
S	AMP 2F	D 0210	87-017-495-080	0E	DIODE,1N5393	US	CX-NDV526
S	AMP 2F	D 0211	87-A40-754-080	0E	ZENER,UZ6.8BSC	US	CX-NDV526
S	AMP 2F	D 0212	87-A40-754-080	0E	ZENER,UZ6.8BSC	US	CX-NDV526
S	AMP 2F	D 0214	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	AMP 2F	D 0216	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	AMP 2F	D 0218	87-017-495-080	0E	DIODE,1N5393	US	CX-NDV526
S	AMP 2F	D 0219	87-017-495-080	0E	DIODE,1N5393	US	CX-NDV526
!	S	IC 0101	87-A21-396-010	1H	IC,STK490-040	US	CX-NDV526
O	AMP 2F	J 0101	87-A61-159-010	1A	JACK,PIN 4P R/W/B/O KM	US	CX-NDV526
X	AMP 2F	JR 0102	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 2F	JR 0103	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 2F	JR 0104	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 2F	JR 0105	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 2F	JR 0107	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	AMP 2F	JR 0108	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	AMP 2F	L 0151	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
O	AMP 2F	L 0152	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
O	AMP 2F	L 0251	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
S	AMP 2F	Q 0101	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S	AMP 2F	Q 0102	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S	AMP 2F	Q 0160	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S	AMP 2F	Q 0161	87-A30-106-040	0E	C-TR,CMBT5551	US	CX-NDV526
S	AMP 2F	Q 0201	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	AMP 2F	Q 0202	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	AMP 2F	Q 0203	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	AMP 2F	Q 0204	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	AMP 2F	Q 0206	87-A30-190-080	0E	TR,CC5551	US	CX-NDV526
S	AMP 2F	Q 0207	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	AMP 2F	Q 0208	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	AMP 2F	Q 0209	87-A30-256-010	1A	TR,2SD1933	US	CX-NDV526
S	AMP 2F	Q 0210	87-A30-255-010	1A	TR,2SB1342	US	CX-NDV526
S	AMP 2F	Q 0211	87-A30-256-010	1A	TR,2SD1933	US	CX-NDV526
S	AMP 2F	Q 0212	87-A30-255-010	1A	TR,2SB1342	US	CX-NDV526
S	AMP 2F	Q 0213	87-A30-107-070	0E	C-TR,CMBT5401	US	CX-NDV526
S	AMP 2F	Q 0214	87-A30-074-080	0E	C-TR,RT1P 141C	US	CX-NDV526
S	AMP 2F	Q 0215	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	AMP 2F	Q 0217	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X	AMP 2F	R 0101	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0102	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0103	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0104	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0105	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0106	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0107	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0108	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	AMP 2F	R 0109	88-118-391-080	0E	C-RES,S 390-1/10W J	US	CX-NDV526
X	AMP 2F	R 0110	88-118-391-080	0E	C-RES,S 390-1/10W J	US	CX-NDV526
X	AMP 2F	R 0111	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0112	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0121	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0123	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0125	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0126	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0127	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0128	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
O	AMP 2F	R 0131	87-A00-258-080	0E	RES,M/F 0.22-1W J	US	CX-NDV526
O	AMP 2F	R 0132	87-A00-258-080	0E	RES,M/F 0.22-1W J	US	CX-NDV526
X	AMP 2F	R 0133	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0134	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0135	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0136	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0137	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0138	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0141	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0142	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0143	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0144	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0145	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0146	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0151	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	AMP 2F	R 0152	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	AMP 2F	R 0153	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0154	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0155	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	AMP 2F	R 0156	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	AMP 2F	R 0160	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0161	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0162	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0163	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0164	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0201	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0202	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0203	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0204	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0205	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0206	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0207	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0208	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0209	88-128-222-080	0E	C-RES, 2.2K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0210	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0211	88-128-222-080	0E	C-RES, 2.2K-1/8W J	US	CX-NDV526
X	AMP 2F	R 0212	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	AMP 2F	R 0213	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0214	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0215	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0216	88-118-390-080	0E	C-RES,S 39-1/10W J	US	CX-NDV526
X	AMP 2F	R 0217	88-118-331-080	0E	C-RES,S 330-1/10W J	US	CX-NDV526
O	AMP 2F	R 0218	87-A00-258-080	0E	RES,M/F 0.22-1W J	US	CX-NDV526
X	AMP 2F	R 0219	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	AMP 2F	R 0220	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	AMP 2F	R 0221	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	AMP 2F	R 0222	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0223	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0224	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0226	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0227	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0228	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0229	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0231	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0232	88-118-272-080	0E	C-RES,S 2.7K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0233	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0235	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0236	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0237	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0238	88-118-271-080	0E	C-RES,S 270-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	AMP 2F	R 0239	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0251	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	AMP 2F	R 0252	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	AMP 2F	R 0253	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
O	AMP 2F	TH 0201	87-A91-042-080	0E	C-THMS,100K 55001	US	CX-NDV526
!	O APPEARANCE		87-CE3-023-010	0E	BADGE,AIWA 30N SILV	US	CX-NDV526
O	APPEARANCE		8A-DJV-001-010	--	CABI,FR U	US	CX-NDV526
O	APPEARANCE		8A-DJV-002-010	--	PANEL,REAR US	US	CX-NDV526
O	APPEARANCE		8A-DJV-003-010	--	CABI,STEEL	US	CX-NDV526
O	APPEARANCE		8A-DJV-004-010	--	WINDOW,DISP U	US	CX-NDV526
O	APPEARANCE		8A-DJV-006-010	--	WINDOW,TRAY DVD	US	CX-NDV526
O	APPEARANCE		8A-DJV-015-010	--	PANEL,FR U	US	CX-NDV526
O	APPEARANCE		8A-DJV-032-010	--	BOX,CASS 1 U	US	CX-NDV526
O	APPEARANCE		8A-DJV-033-010	--	BOX,CASS 2 U	US	CX-NDV526
O	APPEARANCE		8A-DJV-034-010	--	PANEL,CD	US	CX-NDV526
O	APPEARANCE		8A-DJV-059-010	--	COVER, REAR ST US	US	CX-NDV526
!	O APPEARANCE		8A-NF8-010-010	1A	PANEL,TRAY	US	CX-NDV526
!	O APPEARANCE		8A-NF8-014-010	0E	WINDOW,CASS 1	US	CX-NDV526
!	O APPEARANCE		8A-NF8-015-010	0E	WINDOW,CASS 2	US	CX-NDV526
X	CD		M8-AZG-D91-000	--	AZG-D ZAAPA	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0531	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0532	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0533	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0534	87-012-156-080	0E	C-CAP,S 220P-50 J CH GRM	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0535	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0536	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	DSP/ECHO(MIC MIX)	C 0541	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
S	DSP/ECHO(MIC MIX)	Q 0531	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	DSP/ECHO(MIC MIX)	Q 0532	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0531	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0532	88-118-822-080	0E	C-RES,S 8.2K-1/10W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0533	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0534	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0535	88-118-822-080	0E	C-RES,S 8.2K-1/10W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0536	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	DSP/ECHO(MIC MIX)	R 0537	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	E-GEQ	JR 0205	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	E-GEQ	JR 0207	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	E-GEQ	JR 0208	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
!	X ELECTRICAL		87-069-033-010	0E	CABLE,TIE	US	CX-NDV526
!	O ELECTRICAL		87-085-189-010	0E	BUSHING,AC CORD(U) CM-22C	US	CX-NDV526
!	X ELECTRICAL		87-098-374-010	0E	LBL,FUSE 10A 125V	US	CX-NDV526
O	ELECTRICAL		87-A90-457-010	1B	F-BEAD,15-25-15 E2515JRT	US	CX-NDV526
O	ELECTRICAL		87-A91-751-010	1F	FAN,DSB0812M-S382 -400MM	US	CX-NDV526
O	ELECTRICAL		88-910-151-110	0E	FF-CABLE, 10P 1.25 150MM	US	CX-NDV526
O	ELECTRICAL		88-911-101-110	0E	FF-CABLE,11P 1.25	US	CX-NDV526
O	ELECTRICAL		88-911-351-110	1A	FF-CABLE,11P 1.25 350MM	US	CX-NDV526
X	ELECTRICAL		89-955-031-110	0E	WIRE,U24H5-3-3	US	CX-NDV526
O	ELECTRICAL		8A-DJV-620-010	1A	FF-CABLE,13P 1.0 240MM	US	CX-NDV526
O	ELECTRICAL		8A-DJV-621-010	0E	FF-CABLE,5P 1.0 270MM	US	CX-NDV526
!	O ELECTRICAL	PT 0001	8A-DJV-604-010	--	PT,ADJ-28(U)	US	CX-NDV526
!	O ELECTRICAL	W 0001	87-A80-110-010	1B	AC CORD ASSY,U SPT-2W	US	CX-NDV526
O	FLTR	C 0104	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FLTR	C 0105	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FLTR	C 0111	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0112	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0113	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0114	87-010-545-080	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0115	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0116	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0121	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0122	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	FLTR	C 0163	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FLTR	C 0171	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	FLTR	C 0172	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	FLTR	C 0173	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
O	FLTR	C 0174	87-012-368-080	0E	C-CAP,S 0.1-50 Z F	US	CX-NDV526
!	O FLTR	CN 0101	87-A60-996-010	0E	CONN,13P V BLK TAC-L13X-A3	US	CX-NDV526
O	FLTR	J 0102	87-033-229-010	1B	TERMINAL,SPKR 4P YKD21-0242	US	CX-NDV526
O	FLTR	J 0103	87-A60-483-010	1B	JACK,DIA6.3 BLK ST W/S KM	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.


Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	FLTR	JR 0101	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FLTR	JR 0102	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	FLTR	JR 0106	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FLTR	JR 0107	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FLTR	JR 0108	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FLTR	JR 0109	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FLTR	JR 0110	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	FLTR	L 0101	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
O	FLTR	L 0102	87-A50-610-010	0E	COIL,1UH K(MDEC)	US	CX-NDV526
S	FLTR	Q 0101	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0102	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0103	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0104	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0105	87-A30-269-040	0E	C-FET,2SJ461-T1	US	CX-NDV526
S	FLTR	Q 0106	87-A30-269-040	0E	C-FET,2SJ461-T1	US	CX-NDV526
S	FLTR	Q 0107	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0108	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0109	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0110	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	FLTR	Q 0113	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X	FLTR	R 0101	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	FLTR	R 0102	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	FLTR	R 0105	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	FLTR	R 0106	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0107	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0108	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	FLTR	R 0109	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	FLTR	R 0110	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	FLTR	R 0111	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	FLTR	R 0112	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0115	88-118-822-080	0E	C-RES,S 8.2K-1/10W J	US	CX-NDV526
X	FLTR	R 0116	88-118-822-080	0E	C-RES,S 8.2K-1/10W J	US	CX-NDV526
X	FLTR	R 0117	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	FLTR	R 0118	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	FLTR	R 0121	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FLTR	R 0122	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FLTR	R 0123	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	FLTR	R 0124	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	FLTR	R 0125	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	FLTR	R 0126	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	FLTR	R 0127	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0128	88-121-103-080	0E	RES,10K-1/8W J	US	CX-NDV526
X	FLTR	R 0129	88-121-562-080	0E	RES,5.6K-1/8W J	US	CX-NDV526
X	FLTR	R 0130	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	FLTR	R 0131	88-118-474-080	0E	C-RES,S 470K-1/10W J	US	CX-NDV526
X	FLTR	R 0132	88-118-474-080	0E	C-RES,S 470K-1/10W J	US	CX-NDV526
X	FLTR	R 0133	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0134	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0135	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	FLTR	R 0136	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	FLTR	R 0139	88-121-223-080	0E	RES,22K-1/8W J	US	CX-NDV526
X	FLTR	R 0140	88-121-223-080	0E	RES,22K-1/8W J	US	CX-NDV526
X	FLTR	R 0151	88-121-183-080	0E	RES,18K-1/8W J	US	CX-NDV526
X	FLTR	R 0152	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FLTR	R 0153	88-118-683-080	0E	C-RES,S 68K-1/10W J	US	CX-NDV526
X	FLTR	R 0154	88-118-105-080	0E	C-RES,S 1M-1/10W J	US	CX-NDV526
O	FLTR	R 0161	87-A00-439-050	0E	RES,180-1/2W J RP	US	CX-NDV526
O	FLTR	R 0162	87-A00-439-050	0E	RES,180-1/2W J RP	US	CX-NDV526
O	FLTR	R 0163	87-A00-439-050	0E	RES,180-1/2W J RP	US	CX-NDV526
O	FLTR	R 0164	87-A00-439-050	0E	RES,180-1/2W J RP	US	CX-NDV526
X	FLTR	R 0165	88-128-102-080	0E	C-RES, 1K-1/8W J	US	CX-NDV526
X	FLTR	R 0170	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	US	CX-NDV526
X	FLTR	R 0171	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FLTR	R 0172	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FLTR	R 0173	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	FLTR	R 0174	88-130-100-080	0E	RES,10-1/4W J	US	CX-NDV526
X	FLTR	R 0175	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	FLTR	R 0176	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	FLTR	R 0177	88-121-222-080	0E	RES,2.2K-1/8W J	US	CX-NDV526
X	FLTR	R 0178	88-121-222-080	0E	RES,2.2K-1/8W J	US	CX-NDV526



# PARTS LIST

! =  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
! O	FRCB MECHA		88-NF8-205-010	0E	GUIDE,FL	US	CX-NDV526
! O	FRCB MECHA	*	8A-NF8-201-010	1F	GUIDE,FUN	US	CX-NDV526
! O	FRCB MECHA	*	8A-NF8-202-010	0E	GUIDE,OPE 1WAY	US	CX-NDV526
O	FUNC/E.VR	C 0609	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	FUNC/E.VR	C 0610	87-010-181-080	0E	C-CAP,S 1800P-50 K B GRM	US	CX-NDV526
O	FUNC/E.VR	C 0611	87-010-598-080	0E	C-CAP,S 0.068-16 K R GRM	US	CX-NDV526
O	FUNC/E.VR	C 0612	87-010-369-080	0E	C-CAP,S 0.033-25 K B	US	CX-NDV526
O	FUNC/E.VR	C 0613	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	FUNC/E.VR	C 0614	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	FUNC/E.VR	C 0616	87-010-184-080	0E	C-CAP,S 3300P-50 K B C2012	US	CX-NDV526
O	FUNC/E.VR	C 0617	87-010-194-080	0E	C-CAP,S 0.047-25 Z F	US	CX-NDV526
O	FUNC/E.VR	C 0618	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0619	87-010-263-080	0E	CAP,E 100-10 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0620	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	FUNC/E.VR	C 0621	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	FUNC/E.VR	C 0623	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0624	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0626	87-010-596-080	0E	C-CAP,S 0.047-16 K R C2012	US	CX-NDV526
O	FUNC/E.VR	C 0627	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0628	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0629	87-010-596-080	0E	C-CAP,S 0.047-16 K R C2012	US	CX-NDV526
O	FUNC/E.VR	C 0630	87-010-263-080	0E	CAP,E 100-10 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0631	87-010-185-080	0E	C-CAP,S 3900P-50 K B	US	CX-NDV526
O	FUNC/E.VR	C 0632	87-010-185-080	0E	C-CAP,S 3900P-50 K B	US	CX-NDV526
O	FUNC/E.VR	C 0633	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	FUNC/E.VR	C 0634	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FUNC/E.VR	C 0635	87-A12-376-080	--	CAP,M 0.1-100 J CP	US	CX-NDV526
O	FUNC/E.VR	C 0636	87-A12-376-080	--	CAP,M 0.1-100 J CP	US	CX-NDV526
O	FUNC/E.VR	C 0637	87-A12-376-080	--	CAP,M 0.1-100 J CP	US	CX-NDV526
O	FUNC/E.VR	C 0638	87-A12-376-080	--	CAP,M 0.1-100 J CP	US	CX-NDV526
O	FUNC/E.VR	C 0639	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0643	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FUNC/E.VR	C 0644	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0645	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	FUNC/E.VR	C 0671	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	FUNC/E.VR	C 0672	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	FUNC/E.VR	C 0673	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	FUNC/E.VR	C 0676	87-010-382-080	0E	CAP,E 22-25 M 11L SME	US	CX-NDV526
O	FUNC/E.VR	C 0679	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	FUNC/E.VR	C 0680	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
X	FUNC/E.VR	C 0681	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	FUNC/E.VR	C 0682	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
X	FUNC/E.VR	C 0683	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	FUNC/E.VR	C 0685	87-010-190-080	0E	C-CAP,S 0.01-50 Z F C2012	US	CX-NDV526
! O	FUNC/E.VR	CN 0601	87-099-719-010	1B	CONN,30P H BLK TYK-B(X)	US	CX-NDV526
O	FUNC/E.VR	CN 0610	87-A61-171-010	0E	CONN,5P V GRY FMN-BTK	US	CX-NDV526
! O	FUNC/E.VR	CN 0611	87-049-919-010	0E	CONN,3P V WHT EH	US	CX-NDV526
S	FUNC/E.VR	D 0602	87-A40-745-080	0E	ZENER,UZ4.7BSA	US	CX-NDV526
S	FUNC/E.VR	D 0603	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
X	FUNC/E.VR	FB 0601	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
S	FUNC/E.VR	IC 0601	87-A21-452-030	1H	C-IC,BD3876KS2	US	CX-NDV526
O	FUNC/E.VR	J 0604	87-A60-881-010	0E	JACK,PIN 2P MSP 242V05 PBSN	US	CX-NDV526
X	FUNC/E.VR	JR 0608	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0610	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0611	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0612	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	FUNC/E.VR	JR 0613	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	JR 0614	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	JR 0617	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0618	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0619	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	FUNC/E.VR	JR 0620	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0622	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0623	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0624	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0625	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0627	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0630	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0633	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0634	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526

# PARTS LIST

! =  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	FUNC/E.VR	JR 0635	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0636	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	FUNC/E.VR	JR 0637	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
S	FUNC/E.VR	Q 0601	87-026-610-080	0E	TR,KTC3198GR	US	CX-NDV526
S	FUNC/E.VR	Q 0607	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	FUNC/E.VR	Q 0608	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	FUNC/E.VR	Q 0609	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X	FUNC/E.VR	R 0601	88-118-153-080	0E	C-RES,S 15K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0602	88-118-153-080	0E	C-RES,S 15K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0605	88-121-393-080	0E	RES,39K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0606	88-121-393-080	0E	RES,39K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0607	88-121-472-080	0E	RES,4.7K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0608	88-121-472-080	0E	RES,4.7K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0609	88-121-392-080	0E	RES,3.9K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0610	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0611	88-118-153-080	0E	C-RES,S 15K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0612	88-118-153-080	0E	C-RES,S 15K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0613	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0614	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0615	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0616	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0617	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0618	88-118-392-080	0E	C-RES,S 3.9K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0619	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0620	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0621	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0622	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0623	88-121-183-080	0E	RES,18K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0624	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0625	88-128-105-080	0E	C-RES, 1M-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0626	88-130-330-080	0E	RES,33-1/4W J	US	CX-NDV526
X	FUNC/E.VR	R 0627	88-128-390-080	0E	C-RES, 39-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0628	88-128-390-080	0E	C-RES, 39-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0629	88-128-330-080	0E	C-RES, 33-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0630	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0631	88-121-470-080	0E	RES,47-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0632	88-128-680-080	0E	C-RES, 68-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0633	88-128-680-080	0E	C-RES, 68-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0634	88-128-680-080	0E	C-RES, 68-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0635	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0636	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0637	88-121-470-080	0E	RES,47-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0638	88-128-680-080	0E	C-RES, 68-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0639	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0640	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0641	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0642	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0645	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0646	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0647	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0648	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0652	88-121-562-080	0E	RES,5.6K-1/8W J	US	CX-NDV526
X	FUNC/E.VR	R 0657	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0659	88-118-105-080	0E	C-RES,S 1M-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0660	88-118-105-080	0E	C-RES,S 1M-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0661	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0662	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0671	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0672	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	FUNC/E.VR	R 0673	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
O	KNOB		8A-DJV-005-010	--	KEY,FUN DVD	US	CX-NDV526
O	KNOB		8A-DJV-018-010	--	KEY,CD EDIT U	US	CX-NDV526
O	KNOB		8A-DJV-031-010	--	KEY,OPEN	US	CX-NDV526
O	KNOB		8A-DJV-037-010	--	PANEL,DIRECT W/O SILK	US	CX-NDV526
!	O KNOB		8A-NF8-016-010	1B	KEY,POWER	US	CX-NDV526
!	O KNOB		8A-NF8-017-010	0E	REFLECTOR,ECO	US	CX-NDV526
!	O KNOB		8A-NF8-018-110	1A	REFLECTOR,FUN	US	CX-NDV526
!	O KNOB		8A-NF8-019-010	1B	KNOB,RTFY JOG	US	CX-NDV526
!	O KNOB		8A-NF8-022-010	1A	KEY,GEQ	US	CX-NDV526
X	KNOB		8A-NF8-023-110	--	KEY,OPE 1WAY	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
! X	KNOB		8A-NF8-024-010	--	REFLECTOR,FF	US	CX-NDV526
X	KNOB		8A-NF8-025-010	--	REFLECTOR,PLAY 1WAY	US	CX-NDV526
! O	KNOB		8A-NF8-031-210	0E	KEY,DISC	US	CX-NDV526
! O	KNOB		8A-NF8-032-010	0E	CAP, DISC	US	CX-NDV526
! O	KNOB		8A-NF8-035-110	1B	KEY,ASSY OPE 1WAY	US	CX-NDV526
! O	KNOB		8A-NFV-005-010	0E	KEY,MIC	US	CX-NDV526
! O	KNOB		8A-NFV-006-010	0E	KEY,PRO	US	CX-NDV526
X	LBL,POP		87-B40-034-010	1B	LBL,USA 1-800	US	CX-NDV526
X	LBL,POP		8A-DJV-970-010	1B	LBL,POP UL	US	CX-NDV526
X	LBL,POP		8A-DJV-971-010	1B	LBL,POP UR	US	CX-NDV526
X	LBL,POP		8A-NF8-972-010	0E	LBL,POP ENG	US	CX-NDV526
X	MACB MECHA		8A-NF6-227-010	1B	HT-SINK,VM 2	US	CX-NDV526
O	MACB MECHA	*	87-067-001-010	0E	S-SCREW,BVWST2+3-12 W/O SLOT	US	CX-NDV526
X	MECHANICAL		8A-NF7-231-010	1F	CHAS,MAIN AJ 85-65	US	CX-NDV526
O	MIC	C 0502	87-010-186-080	0E	C-CAP,S 4700P-50 K B C2012	US	CX-NDV526
O	MIC	C 0503	87-010-112-040	0E	CAP,E 100-16 M 11L SME	US	CX-NDV526
O	MIC	C 0504	87-010-405-040	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	MIC	C 0505	87-010-545-040	0E	CAP,E 0.22-50 M 11L SME	US	CX-NDV526
O	MIC	C 0506	87-010-320-080	0E	C-CAP,S 68P-50 J CH GRM	US	CX-NDV526
O	MIC	C 0513	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
X	MIC	C 0514	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	MIC	C 0515	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MIC	FB 0501	87-008-372-080	0E	FLTR,EMI BL01 RN1	US	CX-NDV526
X	MIC	FB 0502	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
O	MIC	J 0501	87-A61-243-010	1A	JACK,6.3 BLK MONO W/SW V MSC	US	CX-NDV526
X	MIC	JR 0501	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	MIC	JR 0502	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	MIC	JR 0504	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
S	MIC	Q 0501	87-A30-087-080	0E	C-FET,2SK2158	US	CX-NDV526
S	MIC	Q 0502	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	MIC	Q 0503	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	MIC	Q 0504	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
X	MIC	R 0501	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	MIC	R 0502	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MIC	R 0503	88-128-222-080	0E	C-RES, 2.2K-1/8W J	US	CX-NDV526
X	MIC	R 0504	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MIC	R 0505	88-118-334-080	0E	C-RES,S 330K-1/10W J	US	CX-NDV526
X	MIC	R 0506	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	MIC	R 0507	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	MIC	R 0508	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	MIC	R 0509	88-118-334-080	0E	C-RES,S 330K-1/10W J	US	CX-NDV526
X	MIC	R 0510	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	MIC	R 0517	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	MIC	R 0519	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	MICON	*	8A-DJV-615-010	1E	PWB,FRONT ADJ-V	US	CX-NDV526
O	MICON	C 0201	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0202	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0203	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0204	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0205	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0206	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0207	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0208	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0209	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0210	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0211	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0251	87-010-405-040	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	MICON	C 0253	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0254	87-012-369-080	0E	C-CAP,S 0.047-50 Z F	US	CX-NDV526
O	MICON	C 0255	87-010-560-040	0E	CAP,E 10-50 M 5L MA	US	CX-NDV526
O	MICON	C 0256	87-010-405-040	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	MICON	C 0259	87-010-405-040	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
O	MICON	C 0264	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0270	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MICON	C 0271	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MICON	C 0273	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MICON	C 0274	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MICON	C 0301	87-010-182-080	0E	C-CAP,S 2200P-50 K B C2012	US	CX-NDV526
O	MICON	C 0302	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0303	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526

# PARTS LIST

! =  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	MICON	C 0312	87-010-498-040	0E	CAP,E 10-16 M 5L SRE	US	CX-NDV526
O	MICON	C 0314	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0315	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0316	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0321	87-012-393-080	0E	C-CAP,S 0.22-16 K W5R CM/CB	US	CX-NDV526
O	MICON	C 0322	87-010-400-040	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	MICON	C 0325	87-A10-189-040	0E	CAP,E 220-10 M 5L	US	CX-NDV526
O	MICON	C 0326	87-A10-189-040	0E	CAP,E 220-10 M 5L	US	CX-NDV526
O	MICON	C 0332	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	MICON	C 0334	87-010-312-080	0E	C-CAP,S 15P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0335	87-012-155-080	0E	C-CAP,S 180P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0336	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0339	87-012-156-080	0E	C-CAP,S 220P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0340	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	MICON	C 0341	87-010-194-080	0E	C-CAP,S 0.047-25 Z F	US	CX-NDV526
O	MICON	C 0351	87-010-382-040	0E	CAP,E 22-25 M 11L SME	US	CX-NDV526
O	MICON	C 0401	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	MICON	C 0451	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0452	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0453	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0454	87-010-198-080	0E	C-CAP,S 0.022-25 K B C2012	US	CX-NDV526
O	MICON	C 0455	87-010-198-080	0E	C-CAP,S 0.022-25 K B C2012	US	CX-NDV526
O	MICON	C 0458	87-010-320-080	0E	C-CAP,S 68P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0459	87-010-320-080	0E	C-CAP,S 68P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0602	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0603	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0604	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US	CX-NDV526
O	MICON	C 0650	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	MICON	C 0699	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
!	O MICON	CN 0101	87-099-720-010	1B	CONN,30P BLK TYK-B(P)	US	CX-NDV526
O	MICON	CN 0102	87-A61-356-010	0E	CONN,13P V GRY FMN-BTK	US	CX-NDV526
!	O MICON	CN 0302	87-A60-136-010	0E	CONN,11P V FE	US	CX-NDV526
S	MICON	D 0103	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0104	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0201	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0207	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0209	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0210	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0214	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0215	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0216	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0217	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0218	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0219	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0220	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0221	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0222	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0223	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0224	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0225	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0226	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0227	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0251	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0252	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0253	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0311	87-A40-752-080	0E	ZENER,UZ6.2BSC	US	CX-NDV526
S	MICON	D 0323	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0324	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0326	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
X	MICON	D 0327	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
S	MICON	D 0351	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0352	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0451	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	MICON	D 0452	87-A40-802-080	0E	ZENER,UZ5.1BSC	US	CX-NDV526
O	MICON	FB 0301	87-008-372-080	0E	FLTR,EMI BL01 RN1	US	CX-NDV526
O	MICON	FL 0401	8A-DJV-601-010	2M	FL,HNA-11MM34(ADJ-28)	US	CX-NDV526
S	MICON	IC 0201	8A-DJV-610-030	2A	C-IC,LC87***	US	CX-NDV526
S	MICON	IC 0251	87-A21-629-010	1B	IC,SPS-442-1-N	US	CX-NDV526
S	MICON	IC 0451	87-A21-577-040	1C	C-IC,M61506FP	US	CX-NDV526
S	MICON	IC 0601	87-070-289-040	1B	C-IC,BU2092F	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	JR 0101	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0102	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0103	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0104	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0105	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0106	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0107	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0108	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0201	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0202	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0203	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0210	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0211	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0251	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0253	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0255	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0256	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0302	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0303	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0305	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0306	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0307	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0308	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0309	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0310	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0311	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0351	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0353	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0355	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0357	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0359	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0362	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0365	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0367	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0370	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0371	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
X	MICON	JR 0401	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	JR 0601	88-118-000-080	0E	C-JUMPER, S	US	CX-NDV526
O	MICON	L 0331	87-A50-333-010	0E	COIL, OSC 9.43MHZ	US	CX-NDV526
O	MICON	LED0311	87-A40-589-040	0E	LED, SLR-56VCT31 RED	US	CX-NDV526
O	MICON	LED0601	87-A40-803-010	1D	LED, SELU1E10CXM-S LF38 BLUE	US	CX-NDV526
O	MICON	LED0602	87-A40-619-080	0E	LED, SLR-56PT-TE7-W GRN	US	CX-NDV526
O	MICON	LED0603	87-A40-619-080	0E	LED, SLR-56PT-TE7-W GRN	US	CX-NDV526
O	MICON	LED0605	87-A40-619-080	0E	LED, SLR-56PT-TE7-W GRN	US	CX-NDV526
O	MICON	LED0607	87-A40-619-080	0E	LED, SLR-56PT-TE7-W GRN	US	CX-NDV526
O	MICON	LED0608	87-A40-619-080	0E	LED, SLR-56PT-TE7-W GRN	US	CX-NDV526
S	MICON	Q 0207	87-A30-087-080	0E	C-FET, 2SK2158	US	CX-NDV526
S	MICON	Q 0251	87-A30-074-080	0E	C-TR, RT1P 141C	US	CX-NDV526
S	MICON	Q 0301	87-A30-495-080	0E	TR, 2SA1981Y	US	CX-NDV526
S	MICON	Q 0302	87-A30-495-080	0E	TR, 2SA1981Y	US	CX-NDV526
S	MICON	Q 0303	87-A30-329-080	0E	TR, CD1585BC	US	CX-NDV526
S	MICON	Q 0311	87-026-610-080	0E	TR, KTC3198GR	US	CX-NDV526
S	MICON	Q 0321	87-A30-073-080	0E	C-TR, RT1N 141C	US	CX-NDV526
S	MICON	Q 0322	87-A30-074-080	0E	C-TR, RT1P 141C	US	CX-NDV526
S	MICON	Q 0323	87-A30-076-080	0E	C-TR, 2SC3052F	US	CX-NDV526
S	MICON	Q 0324	87-A30-074-080	0E	C-TR, RT1P 141C	US	CX-NDV526
X	MICON	R 0104	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0105	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0106	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0107	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0108	88-118-223-080	0E	C-RES, S 22K-1/10W J	US	CX-NDV526
X	MICON	R 0109	88-118-101-080	0E	C-RES, S 100-1/10W J	US	CX-NDV526
X	MICON	R 0110	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0112	88-118-101-080	0E	C-RES, S 100-1/10W J	US	CX-NDV526
X	MICON	R 0114	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	MICON	R 0116	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	MICON	R 0117	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	MICON	R 0118	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	MICON	R 0119	88-121-100-080	0E	RES, 10-1/8W J	US	CX-NDV526
X	MICON	R 0122	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0125	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	MICON	R 0126	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	MICON	R 0131	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0132	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0133	88-121-102-080	0E	RES,1K-1/8W J	US	CX-NDV526
X	MICON	R 0134	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	MICON	R 0135	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	MICON	R 0136	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0137	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	MICON	R 0138	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	MICON	R 0141	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0142	88-128-101-080	0E	C-RES, 100-1/8W J	US	CX-NDV526
X	MICON	R 0144	88-121-823-080	0E	RES,82K-1/8W J	US	CX-NDV526
X	MICON	R 0145	88-121-823-080	0E	RES,82K-1/8W J	US	CX-NDV526
X	MICON	R 0201	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0202	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0203	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0204	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0206	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0207	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0208	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0209	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0210	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0211	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0212	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0214	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0215	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0216	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0217	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0218	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0219	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0220	88-128-104-080	0E	C-RES, 100K-1/8W J	US	CX-NDV526
X	MICON	R 0221	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0222	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0223	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0224	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0225	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0226	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0227	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0228	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0229	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0230	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0231	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0232	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0233	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0234	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0235	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0236	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0237	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0238	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0239	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0240	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0241	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0242	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0243	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0244	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0245	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0246	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0247	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0249	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0250	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	MICON	R 0251	88-128-221-080	0E	C-RES, 220-1/8W J	US	CX-NDV526
X	MICON	R 0252	88-128-563-080	0E	C-RES, 56K-1/8W J	US	CX-NDV526
X	MICON	R 0253	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0254	88-118-683-080	0E	C-RES,S 68K-1/10W J	US	CX-NDV526
X	MICON	R 0255	88-118-184-080	0E	C-RES,S 180K-1/10W J	US	CX-NDV526
X	MICON	R 0256	88-118-153-080	0E	C-RES,S 15K-1/10W J	US	CX-NDV526
X	MICON	R 0257	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0258	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0259	88-128-681-080	0E	C-RES, 680-1/8W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0260	88-121-472-080	0E	RES, 4.7K-1/8W J	US	CX-NDV526
X	MICON	R 0264	88-121-472-080	0E	RES, 4.7K-1/8W J	US	CX-NDV526
X	MICON	R 0265	88-128-681-080	0E	C-RES, 680-1/8W J	US	CX-NDV526
X	MICON	R 0268	88-118-101-080	0E	C-RES, S 100-1/10W J	US	CX-NDV526
X	MICON	R 0273	88-118-152-080	0E	C-RES, S 1.5K-1/10W J	US	CX-NDV526
X	MICON	R 0274	88-118-152-080	0E	C-RES, S 1.5K-1/10W J	US	CX-NDV526
X	MICON	R 0275	88-121-152-080	0E	RES, 1.5K-1/8W J	US	CX-NDV526
X	MICON	R 0276	88-121-152-080	0E	RES, 1.5K-1/8W J	US	CX-NDV526
X	MICON	R 0277	88-121-152-080	0E	RES, 1.5K-1/8W J	US	CX-NDV526
X	MICON	R 0278	88-121-152-080	0E	RES, 1.5K-1/8W J	US	CX-NDV526
X	MICON	R 0279	88-121-152-080	0E	RES, 1.5K-1/8W J	US	CX-NDV526
X	MICON	R 0282	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0284	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0285	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0286	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0287	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0304	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0305	88-118-224-080	0E	C-RES, S 220K-1/10W J	US	CX-NDV526
X	MICON	R 0306	88-118-101-080	0E	C-RES, S 100-1/10W J	US	CX-NDV526
X	MICON	R 0310	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0311	88-118-222-080	0E	C-RES, S 2.2K-1/10W J	US	CX-NDV526
X	MICON	R 0312	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	MICON	R 0313	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	R 0314	88-128-479-080	0E	C-RES, 4.7-1/8W J	US	CX-NDV526
X	MICON	R 0315	88-118-471-080	0E	C-RES, S 470-1/10W J	US	CX-NDV526
X	MICON	R 0316	88-129-000-080	0E	C-JUMPER, 3216	US	CX-NDV526
X	MICON	R 0317	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	MICON	R 0321	88-118-103-080	0E	C-RES, S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0323	88-118-682-080	0E	C-RES, S 6.8K-1/10W J	US	CX-NDV526
X	MICON	R 0324	88-118-472-080	0E	C-RES, S 4.7K-1/10W J	US	CX-NDV526
X	MICON	R 0325	88-118-224-080	0E	C-RES, S 220K-1/10W J	US	CX-NDV526
X	MICON	R 0326	88-118-333-080	0E	C-RES, S 33K-1/10W J	US	CX-NDV526
X	MICON	R 0327	88-118-153-080	0E	C-RES, S 15K-1/10W J	US	CX-NDV526
X	MICON	R 0328	88-118-224-080	0E	C-RES, S 220K-1/10W J	US	CX-NDV526
X	MICON	R 0329	88-118-683-080	0E	C-RES, S 68K-1/10W J	US	CX-NDV526
X	MICON	R 0336	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0338	88-118-683-080	0E	C-RES, S 68K-1/10W J	US	CX-NDV526
X	MICON	R 0339	88-118-683-080	0E	C-RES, S 68K-1/10W J	US	CX-NDV526
X	MICON	R 0341	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0350	88-118-104-080	0E	C-RES, S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0351	88-128-473-080	0E	C-RES, 47K-1/8W J	US	CX-NDV526
X	MICON	R 0353	88-118-473-080	0E	C-RES, S 47K-1/10W J	US	CX-NDV526
X	MICON	R 0354	88-118-473-080	0E	C-RES, S 47K-1/10W J	US	CX-NDV526
X	MICON	R 0355	88-118-473-080	0E	C-RES, S 47K-1/10W J	US	CX-NDV526
X	MICON	R 0356	88-128-473-080	0E	C-RES, 47K-1/8W J	US	CX-NDV526
X	MICON	R 0357	88-118-103-080	0E	C-RES, S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0358	88-121-222-080	0E	RES, 2.2K-1/8W J	US	CX-NDV526
X	MICON	R 0359	88-118-103-080	0E	C-RES, S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0360	88-121-222-080	0E	RES, 2.2K-1/8W J	US	CX-NDV526
X	MICON	R 0362	88-121-102-080	0E	RES, 1K-1/8W J	US	CX-NDV526
X	MICON	R 0363	88-128-103-080	0E	C-RES, 10K-1/8W J	US	CX-NDV526
X	MICON	R 0364	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	MICON	R 0401	88-121-102-080	0E	RES, 1K-1/8W J	US	CX-NDV526
X	MICON	R 0402	88-118-821-080	0E	C-RES, S 820-1/10W J	US	CX-NDV526
X	MICON	R 0403	88-121-102-080	0E	RES, 1K-1/8W J	US	CX-NDV526
X	MICON	R 0404	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	US	CX-NDV526
X	MICON	R 0405	88-121-122-080	0E	RES, 1.2K-1/8W J	US	CX-NDV526
X	MICON	R 0406	88-118-182-080	0E	C-RES, S 1.8K-1/10W J	US	CX-NDV526
X	MICON	R 0407	88-118-182-080	0E	C-RES, S 1.8K-1/10W J	US	CX-NDV526
X	MICON	R 0408	88-118-222-080	0E	C-RES, S 2.2K-1/10W J	US	CX-NDV526
X	MICON	R 0409	88-118-332-080	0E	C-RES, S 3.3K-1/10W J	US	CX-NDV526
X	MICON	R 0410	88-118-472-080	0E	C-RES, S 4.7K-1/10W J	US	CX-NDV526
X	MICON	R 0411	88-118-562-080	0E	C-RES, S 5.6K-1/10W J	US	CX-NDV526
X	MICON	R 0413	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0414	88-118-821-080	0E	C-RES, S 820-1/10W J	US	CX-NDV526
X	MICON	R 0415	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0416	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	US	CX-NDV526
X	MICON	R 0417	88-121-122-080	0E	RES, 1.2K-1/8W J	US	CX-NDV526
X	MICON	R 0418	88-121-182-080	0E	RES, 1.8K-1/8W J	US	CX-NDV526
X	MICON	R 0424	88-118-102-080	0E	C-RES, S 1K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0425	88-118-821-080	0E	C-RES,S 820-1/10W J	US	CX-NDV526
X	MICON	R 0426	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	MICON	R 0427	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	US	CX-NDV526
X	MICON	R 0428	88-121-122-080	0E	RES,1.2K-1/8W J	US	CX-NDV526
X	MICON	R 0429	88-118-182-080	0E	C-RES,S 1.8K-1/10W J	US	CX-NDV526
X	MICON	R 0430	88-118-182-080	0E	C-RES,S 1.8K-1/10W J	US	CX-NDV526
X	MICON	R 0431	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	MICON	R 0432	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	MICON	R 0433	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	MICON	R 0435	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0436	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0437	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0438	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0451	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	MICON	R 0452	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	MICON	R 0453	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	MICON	R 0454	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	MICON	R 0455	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	MICON	R 0456	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	MICON	R 0457	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0458	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	MICON	R 0459	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	MICON	R 0461	88-128-181-080	0E	C-RES, 180-1/8W J	US	CX-NDV526
X	MICON	R 0462	88-128-181-080	0E	C-RES, 180-1/8W J	US	CX-NDV526
X	MICON	R 0463	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0464	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	MICON	R 0465	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	MICON	R 0601	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0602	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0603	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	MICON	R 0604	88-121-331-080	0E	RES,330-1/8W J	US	CX-NDV526
X	MICON	R 0605	88-128-681-080	0E	C-RES, 680-1/8W J	US	CX-NDV526
X	MICON	R 0606	88-128-681-080	0E	C-RES, 680-1/8W J	US	CX-NDV526
X	MICON	R 0607	88-128-681-080	0E	C-RES, 680-1/8W J	US	CX-NDV526
X	MICON	R 0609	88-121-681-080	0E	RES,680-1/8W J	US	CX-NDV526
X	MICON	R 0610	88-121-681-080	0E	RES,680-1/8W J	US	CX-NDV526
X	MICON	R 0650	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
O	MICON	S 0401	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0402	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0403	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0404	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0405	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0406	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0407	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0408	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0409	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0410	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0411	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0412	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0413	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0414	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0415	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0416	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0417	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0418	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0419	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0425	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0426	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0427	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0428	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0429	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0430	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0431	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0432	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0433	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0434	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	S 0435	87-A91-024-180	0E	SW,TACT KSHG611BT	US	CX-NDV526
O	MICON	SW 0252	87-A91-555-010	1A	SW,RTRY EC12E24504	US	CX-NDV526
O	MICON	SW 0253	87-A91-542-010	1A	SW,RTRY EC12E12504	US	CX-NDV526
X	MICON	W 0201	89-990-053-410	0E	WIRE,U24X0-5-5 F	US	CX-NDV526



# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
! O	OTHERS		82-NF5-229-010	0E	PLATE, LOCK ( * )	US	CX-NDV526
X	OTHERS		86-AR5-221-010	0E	CUSH, PL	US	CX-NDV526
O	OTHERS		86-NF9-224-010	0E	SPR-C, LOCK	US	CX-NDV526
! X	OTHERS		86-NF2-205-010	0E	CUSH, 12.5-15.5-2 (NP)	US	CX-NDV526
X	OTHERS		87-063-173-010	0E	CLOTH, N9295B BLK 30-10-0.35	US	CX-NDV526
O	OTHERS		87-064-185-010	0E	HLDR, WIRE PVC 0.5	US	CX-NDV526
O	OTHERS		87-084-077-010	0E	RIVET, NYL3.5-4.5	US	CX-NDV526
! O	OTHERS		87-085-221-010	0E	FOOT, H 13.5	US	CX-NDV526
! O	OTHERS		87-NF4-216-010	0E	HLDR, LOCK 1	US	CX-NDV526
! O	OTHERS		87-NF4-217-110	0E	HLDR, LOCK 2	US	CX-NDV526
! O	OTHERS		87-NF4-221-010	0E	HLDR, CABLE	US	CX-NDV526
O	OTHERS		8A-DJV-201-010	--	HLDR, FAN	US	CX-NDV526
X	OTHERS		8A-DJV-203-010	--	HT-SINK, T5A P16	US	CX-NDV526
O	OTHERS		8A-DJV-204-010	--	HLDR, STCB 2	US	CX-NDV526
X	OTHERS		8A-DJV-207-010	--	SH, PL	US	CX-NDV526
O	OTHERS		8A-NF6-210-110	0E	HLDR, IC6	US	CX-NDV526
O	OTHERS		8A-NF6-228-010	0E	HLDR, PWB PT 96-75	US	CX-NDV526
O	OTHERS		8A-NF8-207-010	0E	SPR-T, EJECT 1	US	CX-NDV526
O	OTHERS		8A-NF8-208-010	0E	SPR-T, EJECT 2	US	CX-NDV526
! O	OTHERS		8A-NF8-209-010	1A	OIL-DMPR, 120	US	CX-NDV526
X	OTHERS		8A-NF8-223-010	0E	SH, 8-11-0.4 W/ADH	US	CX-NDV526
X	OTHERS		8A-NFV-201-110	1C	PLATE, PT	US	CX-NDV526
X	OTHERS		8Z-NB8-212-010	0E	PLATE, EARTH MECH	US	CX-NDV526
O	OTHERS		8Z-NB8-254-010	0E	COVER, PL M3	US	CX-NDV526
X	OTHERS		8Z-NF8-203-010	0E	PLATE, EARTH MIC	US	CX-NDV526
O	OTHERS	*	8A-NF7-207-010	1A	HLDR, HT L	US	CX-NDV526
O	OTHERS	*	8A-NF7-208-010	0E	HLDR, HT R	US	CX-NDV526
O	OTHERS	*	8A-NF7-209-010	0E	HLDR, PWB-M BTM	US	CX-NDV526
! O	OTHERS	*	8A-NF8-206-010	0E	HLDR, PWB M	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	*	8A-DJV-630-010	1H	PWB, COMB MAIN (5) ADJ-28	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	*	8A-DJV-631-010	--	PWB, MAIN 1	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	*	8A-DJV-635-010	--	PWB, VM 5	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0003	87-012-368-080	0E	C-CAP, S 0.1-50 Z F	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0004	87-012-368-080	0E	C-CAP, S 0.1-50 Z F	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0021	87-016-658-000	1C	CAP, E 4700-35 M SMG	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0022	87-016-658-000	1C	CAP, E 4700-35 M SMG	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0025	87-010-406-080	0E	CAP, E 22-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0026	87-010-406-080	0E	CAP, E 22-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0027	87-010-406-080	0E	CAP, E 22-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0028	87-010-406-080	0E	CAP, E 22-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0031	87-010-263-080	0E	CAP, E 100-10 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0032	87-010-197-080	0E	C-CAP, S 0.01-25 K B C2012	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0033	87-010-263-080	0E	CAP, E 100-10 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0034	87-010-260-080	0E	CAP, E 47-25 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0035	87-010-380-080	0E	CAP, E 47-16 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0036	87-010-381-080	0E	CAP, E 330-16 M SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0038	87-010-409-080	1A	CAP, E 220-50 M SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0039	87-010-409-080	1A	CAP, E 220-50 M SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0040	87-010-197-080	0E	C-CAP, S 0.01-25 K B C2012	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0060	87-010-403-080	0E	CAP, E 3.3-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0080	87-010-401-080	0E	CAP, E 1-50 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0081	87-010-383-080	0E	CAP, E 33-25 M 11L SME	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	C 0082	87-010-260-080	0E	CAP, E 47-25 M 11L SME	US	CX-NDV526
! O	P-SUPPLY/PWB/FAN	CN 0001	87-A60-996-010	0E	CONN, 13P V BLK TAC-L13X-A3	US	CX-NDV526
! O	P-SUPPLY/PWB/FAN	CN 0091	87-A60-109-010	0E	CONN, 2P V S2M-2W	US	CX-NDV526
! O	P-SUPPLY/PWB/FAN	CNA0001	8A-NF8-653-010	1B	CONN ASSY, 9P TID-A(480)	US	CX-NDV526
O	P-SUPPLY/PWB/FAN	CNA0002	8A-NF6-630-110	0E	CONN ASSY, 3P (VM) ANF-6	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0001	87-A40-224-010	1E	DIODE, GBU8DL	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0025	87-A40-553-080	0E	DIODE, 1N4003 LES	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0026	87-A40-553-080	0E	DIODE, 1N4003 LES	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0027	87-A40-553-080	0E	DIODE, 1N4003 LES	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0028	87-A40-553-080	0E	DIODE, 1N4003 LES	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0029	87-A40-776-080	0E	ZENER, UZ27BSD	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0030	87-020-465-080	0E	DIODE, 1SS133	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0031	87-A40-764-080	0E	ZENER, UZ10BSC	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0032	87-020-465-080	0E	DIODE, 1SS133	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0033	87-A40-553-080	0E	DIODE, 1N4003 LES	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0034	87-020-465-080	0E	DIODE, 1SS133	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0035	87-020-465-080	0E	DIODE, 1SS133	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0060	87-020-465-080	0E	DIODE, 1SS133	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	P-SUPPLY/PWB/FAN	D 0061	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0062	87-A40-313-080	0E	C-DIODE,MC2840	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0063	87-A40-270-080	0E	C-DIODE,MC2838	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0064	87-A40-269-080	0E	C-DIODE,MC2836	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0065	87-A40-768-080	0E	ZENER,UZ16BSA	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0084	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	D 0085	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	JR 0002	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	JR 0003	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0002	87-026-609-080	0E	TR,KTA1266GR	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0005	87-026-610-080	0E	TR,KTC3198GR	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0006	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0007	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0008	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0009	87-A30-495-080	0E	TR,2SA1981Y	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0010	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0011	89-213-702-010	1A	TR,2SB1370E	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0013	89-213-702-010	1A	TR,2SB1370E	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0014	89-213-702-010	1A	TR,2SB1370E	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0060	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0061	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0062	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0063	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0064	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0081	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0082	87-026-610-080	0E	TR,KTC3198GR	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0083	87-A30-075-080	0E	C-TR,2SA1235F	US	CX-NDV526
S	P-SUPPLY/PWB/FAN	Q 0084	87-026-609-080	0E	TR,KTA1266GR	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0001	88-130-109-080	0E	RES,1-1/4W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0002	88-130-109-080	0E	RES,1-1/4W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0005	88-130-109-080	0E	RES,1-1/4W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0006	88-130-109-080	0E	RES,1-1/4W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0011	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0012	88-118-272-080	0E	C-RES,S 2.7K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0013	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0014	88-118-100-080	0E	C-RES,S 10-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0015	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0016	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0019	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0020	88-118-680-080	0E	C-RES,S 68-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0021	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0022	88-118-221-080	0E	C-RES,S 220-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0023	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0024	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0026	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0027	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0028	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0029	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0030	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0031	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0032	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0033	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0034	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0035	88-128-129-080	0E	C-RES, 1.2-1/8W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0036	88-128-129-080	0E	C-RES, 1.2-1/8W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0037	88-118-394-080	0E	C-RES,S 390K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0038	88-128-332-080	0E	C-RES, 3.3K-1/8W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0041	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0042	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0056	88-118-393-080	0E	C-RES,S 39K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0059	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0061	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0062	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0063	88-118-273-080	0E	C-RES,S 27K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0064	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0065	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0067	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0068	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0070	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0084	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-SUPPLY/PWB/FAN	R 0085	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0086	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0087	88-118-474-080	0E	C-RES,S 470K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0088	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0089	88-118-221-080	0E	C-RES,S 220-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0090	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0091	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	P-SUPPLY/PWB/FAN	R 0092	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
! O	P-SUPPLY/PWB/FAN	WH 0001	87-A90-510-010	0E	HLDR,WIRE 2.5-9P	US	CX-NDV526
X	PACKING		87-B40-098-010	0E	BAG,PV 0.025-650-750 PL	US	CX-NDV526
X	PACKING		8A-DJV-851-010	--	CTN,PRINTED US	US	CX-NDV526
X	PACKING		8A-DJV-852-010	1D	CUSHION,FRONT	US	CX-NDV526
X	PACKING		8A-DJV-853-010	1D	CUSHION,REAR	US	CX-NDV526
X	PACKING		93-704-337-010	1A	SH,FOAMED-MAT 0.31-800-500	US	CX-NDV526
O	PLATE		81-532-080-010	1A	LBL,CASS-COMPT	US	CX-NDV526
X	PLATE		84-711-909-010	1A	LBL DATE CODE	US	CX-NDV526
X	PLATE		87-B40-016-010	0E	BAG,PP (BAR-CODE)	US	CX-NDV526
X	PLATE		87-B40-287-010	0E	LBL,BAR-CODE EU 35X8	US	CX-NDV526
X	PLATE		87-B40-419-010	--	LBL,CAUTION DVD	US	CX-NDV526
X	PLATE		8A-NF8-039-010	0E	SH,FUN	US	CX-NDV526
X	PRINTED DU		87-B40-086-010	0E	BAG,PV 0.04-230-400 PL	US	CX-NDV526
X	PRINTED DU		87-B50-053-010	0E	WARR-CARD,USA CUST/AV,VISUAL	US	CX-NDV526
O	PRINTED DU		8A-DJV-903-010	1H	IB,U(ESF)I	US	CX-NDV526
O	PRO LOGIC	C 0401	87-010-176-080	0E	C-CAP,S 680P-50 J SL	US	CX-NDV526
O	PRO LOGIC	C 0402	87-010-176-080	0E	C-CAP,S 680P-50 J SL	US	CX-NDV526
O	PRO LOGIC	C 0403	87-010-958-080	0E	C-CAP,S 0.01-25 J B	US	CX-NDV526
O	PRO LOGIC	C 0404	87-010-958-080	0E	C-CAP,S 0.01-25 J B	US	CX-NDV526
O	PRO LOGIC	C 0405	87-010-958-080	0E	C-CAP,S 0.01-25 J B	US	CX-NDV526
O	PRO LOGIC	C 0406	87-010-958-080	0E	C-CAP,S 0.01-25 J B	US	CX-NDV526
O	PRO LOGIC	C 0407	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0408	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0409	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	PRO LOGIC	C 0410	87-010-384-080	0E	CAP,E 100-25 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0411	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0412	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0413	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0414	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0415	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0416	87-010-546-080	0E	CAP,E 0.33-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0417	87-010-221-080	0E	CAP,E 470-10 M SME	US	CX-NDV526
O	PRO LOGIC	C 0418	87-A10-891-080	0E	CAP,E 4.7-25 SME(K)	US	CX-NDV526
O	PRO LOGIC	C 0419	87-A10-800-080	0E	C-CAP,S 6800P-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0420	87-010-374-080	0E	CAP,E 47-10 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0421	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	PRO LOGIC	C 0422	87-A10-804-080	0E	C-CAP,S 0.1-25 J B	US	CX-NDV526
O	PRO LOGIC	C 0424	87-010-374-080	0E	CAP,E 47-10 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0425	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	PRO LOGIC	C 0429	87-010-544-080	0E	CAP,E 0.1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0430	87-A10-201-080	0E	C-CAP,S 0.33-16 K B	US	CX-NDV526
O	PRO LOGIC	C 0431	87-010-971-080	0E	C-CAP,S 4700P-50 J B	US	CX-NDV526
O	PRO LOGIC	C 0432	87-012-349-080	0E	C-CAP,S 1000P-50 J CH GRM	US	CX-NDV526
O	PRO LOGIC	C 0433	87-A11-183-080	0E	C-CAP,S 0.12-16 J B	US	CX-NDV526
O	PRO LOGIC	C 0434	87-A11-182-080	0E	C-CAP,S 0.27-16 J B	US	CX-NDV526
O	PRO LOGIC	C 0435	87-A11-182-080	0E	C-CAP,S 0.27-16 J B	US	CX-NDV526
O	PRO LOGIC	C 0436	87-A11-183-080	0E	C-CAP,S 0.12-16 J B	US	CX-NDV526
O	PRO LOGIC	C 0437	87-010-971-080	0E	C-CAP,S 4700P-50 J B	US	CX-NDV526
O	PRO LOGIC	C 0438	87-012-349-080	0E	C-CAP,S 1000P-50 J CH GRM	US	CX-NDV526
O	PRO LOGIC	C 0439	87-010-805-080	0E	C-CAP,S 1-16 Z F	US	CX-NDV526
O	PRO LOGIC	C 0440	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0441	87-A10-799-080	0E	C-CAP,S 5600P-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0442	87-A10-802-080	0E	C-CAP,S 0.047-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0443	87-A10-229-080	0E	C-CAP,S 0.68-10 K W5R	US	CX-NDV526
O	PRO LOGIC	C 0444	87-012-393-080	0E	C-CAP,S 0.22-16 K W5R CM/CB	US	CX-NDV526
O	PRO LOGIC	C 0445	87-012-393-080	0E	C-CAP,S 0.22-16 K W5R CM/CB	US	CX-NDV526
O	PRO LOGIC	C 0446	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0447	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0448	87-012-393-080	0E	C-CAP,S 0.22-16 K W5R CM/CB	US	CX-NDV526
O	PRO LOGIC	C 0449	87-012-393-080	0E	C-CAP,S 0.22-16 K W5R CM/CB	US	CX-NDV526
O	PRO LOGIC	C 0450	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	PRO LOGIC	C 0451	87-A10-802-080	0E	C-CAP,S 0.047-16 J B CM	US	CX-NDV526

# PARTS LIST

! =  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	PRO LOGIC	C 0452	87-A10-802-080	0E	C-CAP,S 0.047-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0453	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	PRO LOGIC	C 0454	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	PRO LOGIC	C 0455	87-A10-801-080	0E	C-CAP,S 0.022-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0456	87-A10-801-080	0E	C-CAP,S 0.022-16 J B CM	US	CX-NDV526
O	PRO LOGIC	C 0457	87-016-081-080	0E	C-CAP,S 0.1-16 K R GRM	US	CX-NDV526
O	PRO LOGIC	C 0461	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	PRO LOGIC	C 0463	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	PRO LOGIC	C 0465	87-016-552-080	0E	C-CAP,S 0.082-16 K B C2012	US	CX-NDV526
O	PRO LOGIC	C 0466	87-010-194-080	0E	C-CAP,S 0.047-25 Z F	US	CX-NDV526
O	PRO LOGIC	C 0467	87-A10-201-080	0E	C-CAP,S 0.33-16 K B	US	CX-NDV526
O	PRO LOGIC	C 0468	87-A10-060-080	0E	C-CAP,S 0.18-16 K B	US	CX-NDV526
O	PRO LOGIC	C 0472	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0473	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0474	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0475	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0476	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0477	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	PRO LOGIC	C 0478	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0489	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0491	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	US	CX-NDV526
O	PRO LOGIC	C 0492	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	US	CX-NDV526
X	PRO LOGIC	CLP0401	87-A60-884-010	0E	PIN,DIA1 COATING-SHS	US	CX-NDV526
!	O PRO LOGIC	CN 0431	87-099-013-010	0E	CONN,11P V BLK 6216	US	CX-NDV526
S	PRO LOGIC	D 0401	87-A40-760-080	0E	ZENER,UZ9.1BSA	US	CX-NDV526
S	PRO LOGIC	D 0402	87-A40-747-080	0E	ZENER,UZ5.1BSB	US	CX-NDV526
S	PRO LOGIC	IC 0401	87-A21-097-040	2M	C-IC,M62463AFP	US	CX-NDV526
S	PRO LOGIC	IC 0431	87-A21-015-040	1F	C-IC,M62491FP	US	CX-NDV526
X	PRO LOGIC	JR 0404	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0405	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0414	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0415	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0416	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0417	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0418	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	PRO LOGIC	JR 0420	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	PRO LOGIC	JR 0422	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	PRO LOGIC	JR 0473	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
S	PRO LOGIC	Q 0401	87-A30-086-040	0E	C-TR,CSD1306E	US	CX-NDV526
S	PRO LOGIC	Q 0402	87-A30-086-040	0E	C-TR,CSD1306E	US	CX-NDV526
S	PRO LOGIC	Q 0403	87-A30-202-080	0E	C-TR,RT1P441C	US	CX-NDV526
S	PRO LOGIC	Q 0404	87-A30-086-040	0E	C-TR,CSD1306E	US	CX-NDV526
S	PRO LOGIC	Q 0431	87-A30-086-040	0E	C-TR,CSD1306E	US	CX-NDV526
X	PRO LOGIC	R 0401	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0402	88-118-154-080	0E	C-RES,S 150K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0403	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0404	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0405	88-118-753-080	0E	C-RES,S 75K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0406	88-118-753-080	0E	C-RES,S 75K-1/10W J	US	CX-NDV526
O	PRO LOGIC	R 0407	87-022-214-080	0E	C-RES,S 100K-1/10W F	US	CX-NDV526
X	PRO LOGIC	R 0408	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0409	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0410	88-121-153-080	0E	RES,15K-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0411	88-121-153-080	0E	RES,15K-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0412	88-121-153-080	0E	RES,15K-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0416	88-118-334-080	0E	C-RES,S 330K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0417	88-121-151-080	0E	RES,150-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0418	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0419	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0420	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0421	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0422	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0423	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0424	88-121-101-080	0E	RES,100-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0425	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0426	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0427	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0428	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0429	88-118-225-080	0E	C-RES,S 2.2M-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0431	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526

# PARTS LIST

! =△SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	PRO LOGIC	R 0432	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0433	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0434	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0435	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0436	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0438	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0439	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0440	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0441	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0442	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0443	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0444	88-121-100-080	0E	RES,10-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0447	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0448	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0449	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0450	88-118-123-080	0E	C-RES,S 12K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0451	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0452	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0457	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0459	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0461	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0464	88-118-272-080	0E	C-RES,S 2.7K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0466	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0467	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0468	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0469	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0470	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0473	88-121-222-080	0E	RES,2.2K-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0474	88-121-222-080	0E	RES,2.2K-1/8W J	US	CX-NDV526
X	PRO LOGIC	R 0475	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0476	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0480	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0481	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	PRO LOGIC	R 0482	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	PT	*	8A-NF6-641-110	1C	PWB,PT 96-60	US	CX-NDV526
O	PT	C 0001	87-010-387-080	1A	CAP,E 470-25 M SME	US	CX-NDV526
O	PT	C 0004	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0005	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0006	87-010-917-000	1D	CAP,E 3300-50 M SMG	US	CX-NDV526
O	PT	C 0007	87-010-917-000	1D	CAP,E 3300-50 M SMG	US	CX-NDV526
O	PT	C 0008	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0009	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0010	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0011	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0012	87-016-520-000	1D	CAP,E 3300-65 M SMG	US	CX-NDV526
O	PT	C 0013	87-016-520-000	1D	CAP,E 3300-65 M SMG	US	CX-NDV526
O	PT	C 0014	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0015	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	US	CX-NDV526
O	PT	C 0016	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
!	O PT	CN 0001	87-A61-110-010	0E	CONN,9P V TID-A	US	CX-NDV526
!	O PT	CN 0002	87-A61-108-010	0E	CONN,5P V TID-A	US	CX-NDV526
S	PT	D 0001	87-A40-839-090	1A	DIODE,G5SBA60L-6088	US	CX-NDV526
S	PT	D 0002	87-A40-839-090	1A	DIODE,G5SBA60L-6088	US	CX-NDV526
S	PT	D 0004	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0005	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0006	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0007	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0008	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0009	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0010	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0011	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0012	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0013	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0014	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0015	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0016	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0017	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0018	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0019	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	PT	D 0020	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	PT	D 0021	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
X	PT	PR 0001	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0002	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0003	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0004	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0005	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0006	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
X	PT	PR 0009	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
!	O PT	PT 0002	8A-NF8-661-010	1C	PT,SUB ANF-8 (U)	US	CX-NDV526
S	PT	Q 0001	87-026-245-080	0E	TR,DTC114ES	US	CX-NDV526
S	PT	Q 0002	87-A30-198-080	0E	TR,KTC3199GR	US	CX-NDV526
X	PT	R 0001	88-121-183-080	0E	RES,18K-1/8W J	US	CX-NDV526
X	PT	R 0002	88-121-183-080	0E	RES,18K-1/8W J	US	CX-NDV526
X	PT	R 0003	88-121-392-080	0E	RES,3.9K-1/8W J	US	CX-NDV526
X	PT	R 0004	88-130-183-080	0E	RES,18K-1/4W J	US	CX-NDV526
X	PT	R 0005	88-130-183-080	0E	RES,18K-1/4W J	US	CX-NDV526
X	PT	R 0006	88-121-392-080	0E	RES,3.9K-1/8W J	US	CX-NDV526
X	PT	R 0008	88-121-473-080	0E	RES,47K-1/8W J	US	CX-NDV526
X	PT	R 0010	88-121-683-080	0E	RES,68K-1/8W J	US	CX-NDV526
X	PT	R 0011	88-121-394-080	0E	RES,390K-1/8W J	US	CX-NDV526
X	PT	R 0012	88-121-394-080	0E	RES,390K-1/8W J	US	CX-NDV526
X	PT	R 0013	88-130-101-080	0E	RES,100-1/4W J	US	CX-NDV526
X	PT	R 0014	88-121-333-080	0E	RES,33K-1/8W J	US	CX-NDV526
X	PT	R 0017	88-121-473-080	0E	RES,47K-1/8W J	US	CX-NDV526
X	PT	R 0018	88-121-683-080	0E	RES,68K-1/8W J	US	CX-NDV526
X	PT	R 0099	88-140-225-080	0E	RES,2.2M-1/2W J	US	CX-NDV526
!	O PT	RY 0002	87-A91-418-010	1B	RELAY,AC12V G5PA-1-M	US	CX-NDV526
O	PT	T 0001	87-A60-317-010	1P	TERMINAL, 1P MSC	US	CX-NDV526
O	PT	T 0002	87-A60-317-010	0E	TERMINAL, 1P MSC	US	CX-NDV526
O	SCREW		87-067-581-010	0E	BVT2+3-15 W/O SL0T	US	CX-NDV526
O	SCREW		87-067-584-010	0E	BVT2+3-6 W/O SL0T	US	CX-NDV526
O	SCREW		87-067-641-010	0E	UTT2+3-8 W/O SLOT BLK	US	CX-NDV526
O	SCREW		87-067-688-010	0E	BVTT+3-6	US	CX-NDV526
O	SCREW		87-067-689-010	0E	BVTT+3-8	US	CX-NDV526
O	SCREW		87-067-703-010	0E	BVT2+3-10 W/O SL0T	US	CX-NDV526
O	SCREW		87-078-191-010	0E	S-SCREW,IT+4-10 SWCH12A	US	CX-NDV526
O	SCREW		87-721-097-410	0E	QT2+3-12 W/O SLOT	US	CX-NDV526
O	SCREW		87-723-096-410	0E	QT2+3-10 W/O SLOT BLK	US	CX-NDV526
O	SCREW		87-NF4-224-010	0E	S-SCREW,IT3B+3-8 CU	US	CX-NDV526
X	TAPE		M8-ZZM-391-040	--	ZZM-3 YPR1NF	US	CX-NDV526
O	TAPE DECK	C 0301	87-010-318-080	0E	C-CAP,S 47P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0302	87-010-318-080	0E	C-CAP,S 47P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0303	87-012-157-080	0E	C-CAP,S 330P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0304	87-012-157-080	0E	C-CAP,S 330P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0305	87-012-157-080	0E	C-CAP,S 330P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0306	87-012-157-080	0E	C-CAP,S 330P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0307	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0309	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0310	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0311	87-010-198-080	0E	C-CAP,S 0.022-25 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0312	87-010-198-080	0E	C-CAP,S 0.022-25 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0313	87-010-180-080	0E	C-CAP,S 1500P-50 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0314	87-010-180-080	0E	C-CAP,S 1500P-50 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0315	87-010-182-080	0E	C-CAP,S 2200P-50 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0316	87-010-182-080	0E	C-CAP,S 2200P-50 K B C2012	US	CX-NDV526
X	TAPE DECK	C 0317	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	C 0318	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TAPE DECK	C 0321	87-012-142-080	0E	C-CAP,S 0.33-16 Z F GRM	US	CX-NDV526
O	TAPE DECK	C 0322	87-012-142-080	0E	C-CAP,S 0.33-16 Z F GRM	US	CX-NDV526
O	TAPE DECK	C 0324	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0325	87-010-370-080	0E	CAP,E 330-6.3 M SME	US	CX-NDV526
O	TAPE DECK	C 0327	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0328	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0332	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0335	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0336	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0337	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0339	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0340	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0351	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TAPE DECK	C 0352	87-012-140-080	0E	C-CAP,S 470P-50 J CH	US	CX-NDV526
O	TAPE DECK	C 0354	87-010-175-080	0E	C-CAP,S 560P-50 J SL	US	CX-NDV526
O	TAPE DECK	C 0355	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0356	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0357	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TAPE DECK	C 0358	87-010-183-080	0E	C-CAP,S 2700P-50 K B GRM	US	CX-NDV526
O	TAPE DECK	C 0359	87-010-183-080	0E	C-CAP,S 2700P-50 K B GRM	US	CX-NDV526
O	TAPE DECK	C 0360	87-010-183-080	0E	C-CAP,S 2700P-50 K B GRM	US	CX-NDV526
O	TAPE DECK	C 0363	87-A12-361-080	--	CAP,M 5600P-100 J CP	US	CX-NDV526
O	TAPE DECK	C 0370	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0373	87-A11-177-080	0E	C-CAP,S 0.15-16 K B	US	CX-NDV526
O	TAPE DECK	C 0374	87-A11-177-080	0E	C-CAP,S 0.15-16 K B	US	CX-NDV526
O	TAPE DECK	C 0378	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0379	87-010-382-080	0E	CAP,E 22-25 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0380	87-010-382-080	0E	CAP,E 22-25 M 11L SME	US	CX-NDV526
O	TAPE DECK	C 0386	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TAPE DECK	C 0388	87-012-156-080	0E	C-CAP,S 220P-50 J CH GRM	US	CX-NDV526
O	TAPE DECK	C 0391	87-010-319-080	0E	C-CAP,S 56P-50 J CH	US	CX-NDV526
O	TAPE DECK	C 0392	87-010-319-080	0E	C-CAP,S 56P-50 J CH	US	CX-NDV526
O	TAPE DECK	C 0393	87-010-319-080	0E	C-CAP,S 56P-50 J CH	US	CX-NDV526
O	TAPE DECK	C 0394	87-010-319-080	0E	C-CAP,S 56P-50 J CH	US	CX-NDV526
X	TAPE DECK	CLP0301	87-A60-884-010	0E	PIN,DIAL COATING-SHS	US	CX-NDV526
X	TAPE DECK	CLP0302	87-A60-884-010	0E	PIN,DIAL COATING-SHS	US	CX-NDV526
!	O	CN 0301	87-099-827-010	0E	CONN,3P V S2M-3W	US	CX-NDV526
!	O	CN 0351	87-099-832-010	0E	CONN,8P V S2M-8W	US	CX-NDV526
S	TAPE DECK	D 0352	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	TAPE DECK	D 0353	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
X	TAPE DECK	FB 0301	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
S	TAPE DECK	IC 0303	87-A20-783-040	1D	C-IC,BA7762AFS	US	CX-NDV526
X	TAPE DECK	JR 0301	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0302	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0305	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0306	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0307	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0309	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0310	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0311	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0312	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0313	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0314	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0315	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0316	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0317	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0321	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0322	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0323	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0325	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0326	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0327	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0328	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0329	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0330	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0333	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0334	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0335	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0338	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	JR 0339	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0340	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	JR 0341	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TAPE DECK	L 0301	87-A50-625-010	0E	COIL,TRAP 85KHZ (SANWA)	US	CX-NDV526
O	TAPE DECK	L 0302	87-A50-625-010	0E	COIL,TRAP 85KHZ (SANWA)	US	CX-NDV526
O	TAPE DECK	L 0351	87-007-342-010	0E	COIL,OSC 85KHZ BIAS	US	CX-NDV526
S	TAPE DECK	Q 0351	87-A30-087-080	0E	C-FET,2SK2158	US	CX-NDV526
S	TAPE DECK	Q 0353	87-A30-087-080	0E	C-FET,2SK2158	US	CX-NDV526
S	TAPE DECK	Q 0354	87-A30-087-080	0E	C-FET,2SK2158	US	CX-NDV526
S	TAPE DECK	Q 0355	87-A30-105-080	0E	C-TR,RT1P 441C	US	CX-NDV526
S	TAPE DECK	Q 0357	87-026-609-080	0E	TR,KTA1266GR	US	CX-NDV526
S	TAPE DECK	Q 0358	87-026-610-080	0E	TR,KTC3198GR	US	CX-NDV526
S	TAPE DECK	Q 0359	87-026-610-080	0E	TR,KTC3198GR	US	CX-NDV526
S	TAPE DECK	Q 0361	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TAPE DECK	R 0301	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0302	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0303	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0304	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0305	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0306	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0307	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0308	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0309	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0310	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0311	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0312	88-118-472-080	0E	C-RES,S 4.7K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0314	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0315	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0316	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0317	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0318	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0319	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0320	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0323	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	R 0324	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	R 0332	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0333	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0335	88-121-223-080	0E	RES,22K-1/8W J	US	CX-NDV526
X	TAPE DECK	R 0336	88-121-223-080	0E	RES,22K-1/8W J	US	CX-NDV526
X	TAPE DECK	R 0337	88-118-563-080	0E	C-RES,S 56K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0338	88-118-183-080	0E	C-RES,S 18K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0350	88-130-180-080	0E	RES,18-1/4W J	US	CX-NDV526
X	TAPE DECK	R 0351	88-118-105-080	0E	C-RES,S 1M-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0352	88-118-152-080	0E	C-RES,S 1.5K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0353	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0354	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TAPE DECK	R 0355	88-128-829-080	0E	C-RES, 8.2-1/8W J	US	CX-NDV526
X	TAPE DECK	R 0356	88-118-183-080	0E	C-RES,S 18K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0357	88-118-183-080	0E	C-RES,S 18K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0359	88-128-100-080	0E	C-RES, 10-1/8W J	US	CX-NDV526
X	TAPE DECK	R 0360	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0363	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0364	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	R 0371	88-118-390-080	0E	C-RES,S 39-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0372	88-118-390-080	0E	C-RES,S 39-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0373	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0374	88-118-471-080	0E	C-RES,S 470-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0393	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TAPE DECK	R 0395	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0396	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0397	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	TAPE DECK	R 0398	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
O	TAPE DECK	SFR0351	87-A90-433-080	0E	SFR,50K H NVZ6TLTA	US	CX-NDV526
O	TAPE DECK	SFR0352	87-A90-433-080	0E	SFR,50K H NVZ6TLTA	US	CX-NDV526
X	TAPE DECK	SH 0301	87-MA6-202-010	0E	PLATE,SHLD DECK	US	CX-NDV526
O	TUNER(IF)	C 0771	87-010-263-080	0E	CAP,E 100-10 M 11L SME	US	CX-NDV526
O	TUNER(IF)	C 0772	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0779	87-010-426-080	0E	C-CAP,S 0.012-25 K B	US	CX-NDV526
O	TUNER(IF)	C 0780	87-010-426-080	0E	C-CAP,S 0.012-25 K B	US	CX-NDV526
X	TUNER(IF)	C 0781	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TUNER(IF)	C 0782	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0783	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0784	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0785	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0786	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0788	87-010-149-080	0E	C-CAP,S 5P-50 C CH GRM	US	CX-NDV526
O	TUNER(IF)	C 0789	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	US	CX-NDV526
O	TUNER(IF)	C 0790	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	US	CX-NDV526
O	TUNER(IF)	C 0791	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TUNER(IF)	C 0792	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0793	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	TUNER(IF)	C 0795	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0796	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER(IF)	C 0797	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526



# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TUNER (IF)	C 0798	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER (IF)	C 0799	87-010-407-080	0E	CAP,E 33-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0800	87-010-194-080	0E	C-CAP,S 0.047-25 Z F	US	CX-NDV526
O	TUNER (IF)	C 0801	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0802	87-010-194-080	0E	C-CAP,S 0.047-25 Z F	US	CX-NDV526
O	TUNER (IF)	C 0803	87-010-198-080	0E	C-CAP,S 0.022-25 K B C2012	US	CX-NDV526
O	TUNER (IF)	C 0804	87-010-263-080	0E	CAP,E 100-10 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0807	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0808	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0809	87-010-401-080	0E	CAP,E 1-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0810	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TUNER (IF)	C 0811	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0812	87-010-403-080	0E	CAP,E 3.3-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0814	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
O	TUNER (IF)	C 0815	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0816	87-010-400-080	0E	CAP,E 0.47-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0821	87-010-405-080	0E	CAP,E 10-50 M 11L SME	US	CX-NDV526
X	TUNER (IF)	C 0822	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TUNER (IF)	C 0823	87-010-177-080	0E	C-CAP,S 820P-50 J SL C2012	US	CX-NDV526
O	TUNER (IF)	C 0824	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US	CX-NDV526
O	TUNER (IF)	C 0825	87-010-596-080	0E	C-CAP,S 0.047-16 K R C2012	US	CX-NDV526
X	TUNER (IF)	D 0801	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
S	TUNER (IF)	D 0803	87-020-465-080	0E	DIODE,1SS133	US	CX-NDV526
S	TUNER (IF)	IC 0801	87-A21-560-010	1C	IC,LA1844L-A	US	CX-NDV526
X	TUNER (IF)	JR 0780	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TUNER (IF)	JR 0781	88-129-000-080	0E	C-JUMPER,3216	US	CX-NDV526
X	TUNER (IF)	JR 0785	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0786	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0792	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0795	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0797	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0801	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0821	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	JR 0822	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TUNER (IF)	L 0801	87-A50-608-010	0E	COIL,FM DET-N(TOK)	US	CX-NDV526
O	TUNER (IF)	L 0802	87-A91-551-010	1A	FLTR,PCFJZH-450 L(TOK)	US	CX-NDV526
O	TUNER (IF)	L 0811	87-005-847-080	0E	COIL,2.2UH K CECS	US	CX-NDV526
S	TUNER (IF)	Q 0801	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
S	TUNER (IF)	Q 0802	87-A30-076-080	0E	C-TR,2SC3052F	US	CX-NDV526
X	TUNER (IF)	R 0773	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0774	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0775	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0776	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
O	TUNER (IF)	R 0790	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
X	TUNER (IF)	R 0791	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0793	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	R 0795	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	R 0801	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0802	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0803	88-128-183-080	0E	C-RES, 18K-1/8W J	US	CX-NDV526
X	TUNER (IF)	R 0804	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	R 0805	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0806	88-118-682-080	0E	C-RES,S 6.8K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0807	88-118-821-080	0E	C-RES,S 820-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0808	88-118-821-080	0E	C-RES,S 820-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0809	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0810	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0811	88-118-474-080	0E	C-RES,S 470K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0812	88-118-474-080	0E	C-RES,S 470K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0813	88-118-224-080	0E	C-RES,S 220K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0814	88-118-105-080	0E	C-RES,S 1M-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0815	88-121-682-080	0E	RES,6.8K-1/8W J	US	CX-NDV526
X	TUNER (IF)	R 0818	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0821	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER (IF)	R 0823	88-118-333-080	0E	C-RES,S 33K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0824	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0825	88-118-473-080	0E	C-RES,S 47K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0826	88-118-223-080	0E	C-RES,S 22K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0827	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526
X	TUNER (IF)	R 0828	88-118-332-080	0E	C-RES,S 3.3K-1/10W J	US	CX-NDV526

# PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TUNER (PLL)	C	0971	87-010-381-080	0E	CAP,E 330-16 M SME	US CX-NDV526
O	TUNER (PLL)	C	0972	87-010-404-080	0E	CAP,E 4.7-50 M 11L SME	US CX-NDV526
O	TUNER (PLL)	C	0973	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0974	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0979	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US CX-NDV526
O	TUNER (PLL)	C	0981	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US CX-NDV526
O	TUNER (PLL)	C	0982	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US CX-NDV526
O	TUNER (PLL)	C	0983	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0984	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0987	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0991	87-010-312-080	0E	C-CAP,S 15P-50 J CH GRM	US CX-NDV526
O	TUNER (PLL)	C	0992	87-010-312-080	0E	C-CAP,S 15P-50 J CH GRM	US CX-NDV526
O	TUNER (PLL)	C	0993	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0995	87-010-178-080	0E	C-CAP,S 1000P-50 K B C2012	US CX-NDV526
O	TUNER (PLL)	C	0997	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US CX-NDV526
O	TUNER (PLL)	C	0998	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US CX-NDV526
S	TUNER (PLL)	D	0804	87-020-465-080	0E	DIODE,1SS133	US CX-NDV526
S	TUNER (PLL)	D	0991	87-017-149-080	0E	ZENER,HZS6A2L	US CX-NDV526
S	TUNER (PLL)	IC	0991	87-070-127-110	1C	IC,LC72131D	US CX-NDV526
X	TUNER (PLL)	JR	0802	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0960	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0961	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0971	88-129-000-080	0E	C-JUMPER,3216	US CX-NDV526
X	TUNER (PLL)	JR	0972	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0973	88-129-000-080	0E	C-JUMPER,3216	US CX-NDV526
X	TUNER (PLL)	JR	0974	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0976	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0977	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (PLL)	JR	0988	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
S	TUNER (PLL)	Q	0981	87-A30-234-080	0E	TR,CSC4115BC	US CX-NDV526
X	TUNER (PLL)	R	0975	88-118-562-080	0E	C-RES,S 5.6K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0976	88-118-102-080	0E	C-RES,S 1K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0977	88-118-102-080	0E	C-RES,S 1K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0978	88-118-681-080	0E	C-RES,S 680-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0980	88-118-684-080	0E	C-RES,S 680K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0981	88-121-471-080	0E	RES,470-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0982	88-118-822-080	0E	C-RES,S 8.2K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0983	88-118-101-080	0E	C-RES,S 100-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0984	88-121-181-080	0E	RES,180-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0985	88-121-471-080	0E	RES,470-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0986	88-128-222-080	0E	C-RES, 2.2K-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0987	88-121-472-080	0E	RES,4.7K-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0988	88-118-103-080	0E	C-RES,S 10K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0989	88-121-102-080	0E	RES,1K-1/8W J	US CX-NDV526
X	TUNER (PLL)	R	0990	88-118-563-080	0E	C-RES,S 56K-1/10W J	US CX-NDV526
O	TUNER (PLL)	R	0991	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US CX-NDV526
X	TUNER (PLL)	R	0992	88-118-103-080	0E	C-RES,S 10K-1/10W J	US CX-NDV526
O	TUNER (PLL)	R	0993	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US CX-NDV526
X	TUNER (PLL)	R	0994	88-118-103-080	0E	C-RES,S 10K-1/10W J	US CX-NDV526
O	TUNER (PLL)	R	0995	87-010-322-080	0E	C-CAP,S 100P-50 J CH GRM	US CX-NDV526
X	TUNER (PLL)	R	0996	88-118-103-080	0E	C-RES,S 10K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0997	88-118-154-080	0E	C-RES,S 150K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0998	88-118-102-080	0E	C-RES,S 1K-1/10W J	US CX-NDV526
X	TUNER (PLL)	R	0999	88-118-103-080	0E	C-RES,S 10K-1/10W J	US CX-NDV526
O	TUNER (PLL)	X	0991	87-A70-061-010	1A	VIB,XTAL 4.500MHZ CSA-309	US CX-NDV526
X	TUNER (RDS)	JR	0871	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
X	TUNER (RDS)	JR	0873	88-118-000-080	0E	C-JUMPER,S	US CX-NDV526
O	TUNER (RF)	C	0842	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0843	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0844	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0845	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0846	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0847	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0848	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0849	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0850	87-010-260-080	0E	CAP,E 47-25 M 11L SME	US CX-NDV526
O	TUNER (RF)	C	0851	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0852	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0853	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US CX-NDV526
O	TUNER (RF)	C	0858	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US CX-NDV526

## PARTS LIST

! =  $\Delta$  SAFTY PARTS  
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.


Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.


K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TUNER(RF)	C 0859	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TUNER(RF)	C 0860	87-010-197-080	0E	C-CAP,S 0.01-25 K B C2012	US	CX-NDV526
X	TUNER(RF)	C 0940	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TUNER(RF)	C 0959	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TUNER(RF)	C 0960	87-010-196-080	0E	C-CAP,S 0.1-25 Z F C2012	US	CX-NDV526
O	TUNER(RF)	C 0961	87-010-152-080	0E	C-CAP,S 8P-50 D CH GRM	US	CX-NDV526
O	TUNER(RF)	C 0963	87-015-785-080	0E	C-CAP, 0.1-25 Z F C3216	US	CX-NDV526
O	TUNER(RF)	C 0999	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	US	CX-NDV526
O	TUNER(RF)	CF 0831	87-008-261-010	1A	FLTR,CF SFE10.7MA5	US	CX-NDV526
O	TUNER(RF)	CF 0832	87-008-261-010	1A	FLTR,CF SFE10.7MA5	US	CX-NDV526
X	TUNER(RF)	D 0944	88-100-000-010	0E	PLATING-JW, 0.58 SN95	US	CX-NDV526
O	TUNER(RF)	FFE0831	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	US	CX-NDV526
O	TUNER(RF)	J 0831	87-A61-456-010	--	TERMINAL,ANT 4P MSP-154V-02 PB	US	CX-NDV526
X	TUNER(RF)	JR 0834	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0835	88-128-561-080	0E	C-RES, 560-1/8W J	US	CX-NDV526
X	TUNER(RF)	JR 0836	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0943	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0946	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0951	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0952	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0954	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
X	TUNER(RF)	JR 0955	88-118-000-080	0E	C-JUMPER,S	US	CX-NDV526
O	TUNER(RF)	L 0832	87-005-847-080	0E	COIL,2.2UH K CECS	US	CX-NDV526
O	TUNER(RF)	L 0951	8A-NF8-667-010	1C	COIL,AM PACK 4(TOK)	US	CX-NDV526
S	TUNER(RF)	Q 0835	89-327-143-080	0E	C-TR,2SC27140	US	CX-NDV526
S	TUNER(RF)	Q 0836	87-A30-072-080	0E	C-TR,RT1P 144C	US	CX-NDV526
X	TUNER(RF)	R 0832	88-118-391-080	0E	C-RES,S 390-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0836	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0839	88-118-151-080	0E	C-RES,S 150-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0840	88-118-221-080	0E	C-RES,S 220-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0850	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0851	88-118-470-080	0E	C-RES,S 47-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0852	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0853	88-118-102-080	0E	C-RES,S 1K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0854	88-118-331-080	0E	C-RES,S 330-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0855	88-118-183-080	0E	C-RES,S 18K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0856	88-118-103-080	0E	C-RES,S 10K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0857	88-118-181-080	0E	C-RES,S 180-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0858	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0860	88-118-101-080	0E	C-RES,S 100-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0945	88-118-104-080	0E	C-RES,S 100K-1/10W J	US	CX-NDV526
X	TUNER(RF)	R 0962	88-121-221-080	0E	RES,220-1/8W J	US	CX-NDV526
X	TUNER(RF)	R 0963	88-118-330-080	0E	C-RES,S 33-1/10W J	US	CX-NDV526
X	TUNER(RF)	SH 0831	87-A90-023-010	0E	SHLD-PLATE,ANT	US	CX-NDV526

SCHEMATIC DIAGRAM-1 (MAIN: 1/4)

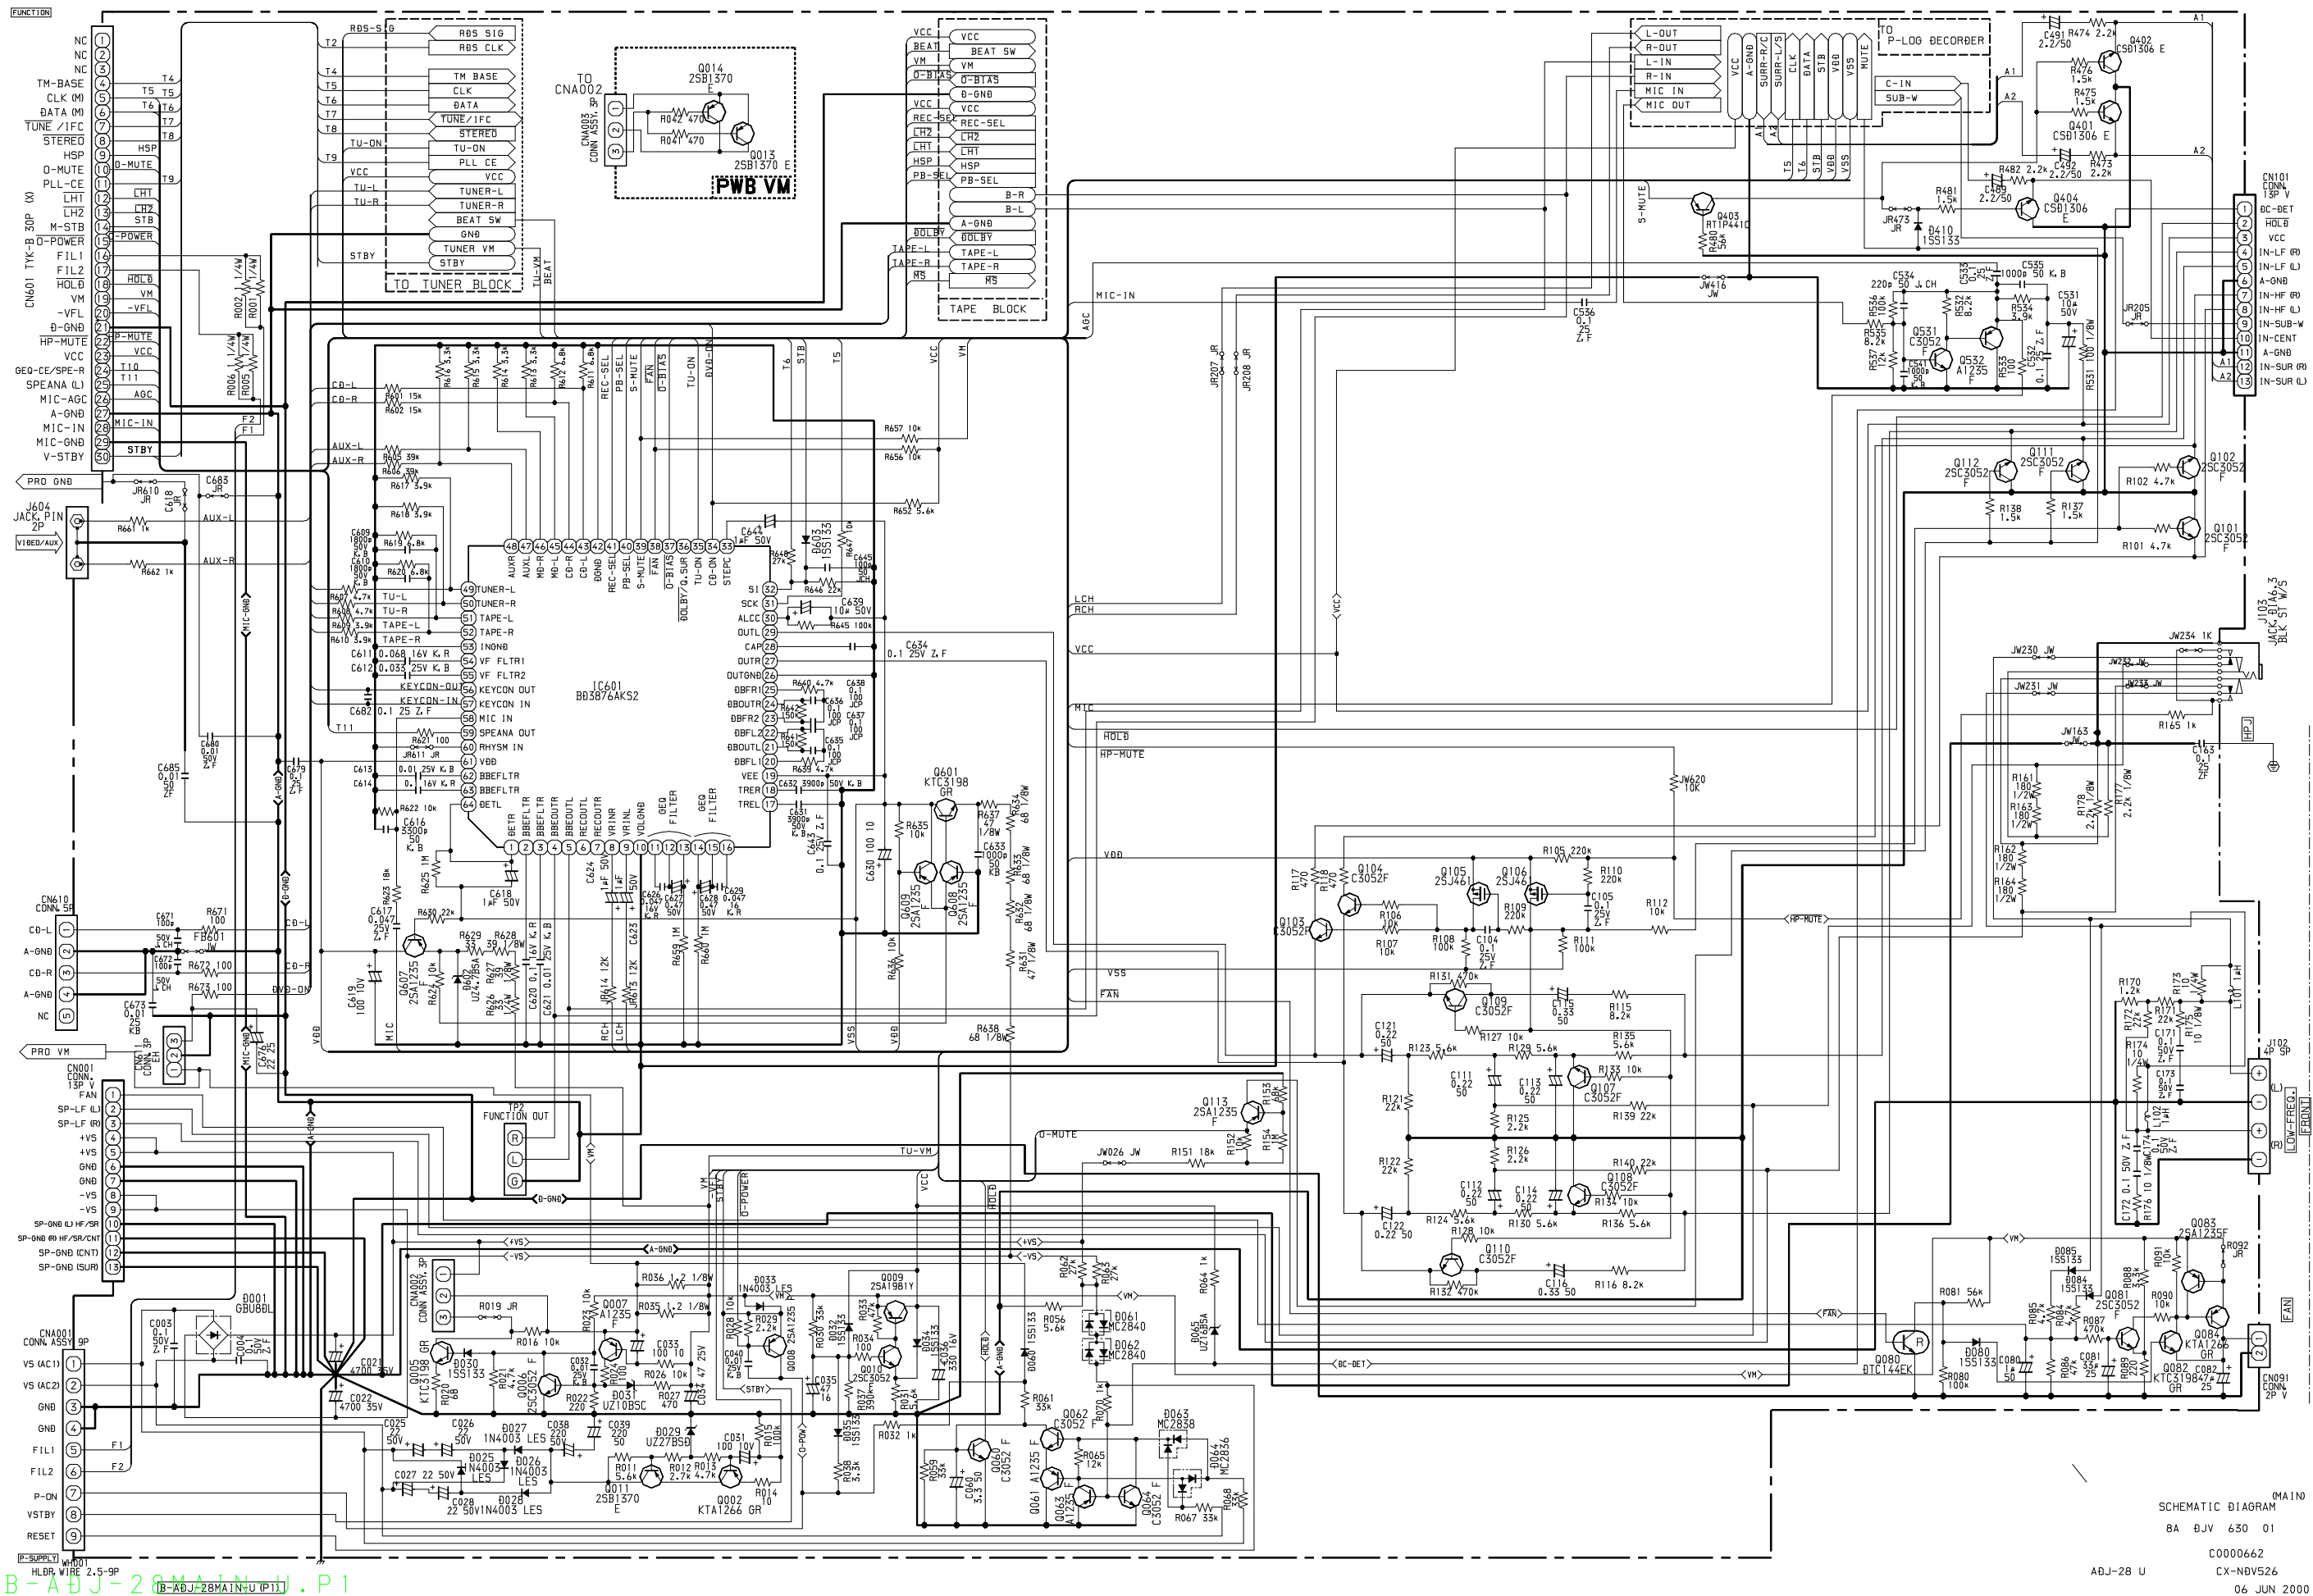

SCHEMATIC DIAGRAM - 2 (MAIN: 2/4 <DECK SECTION>)

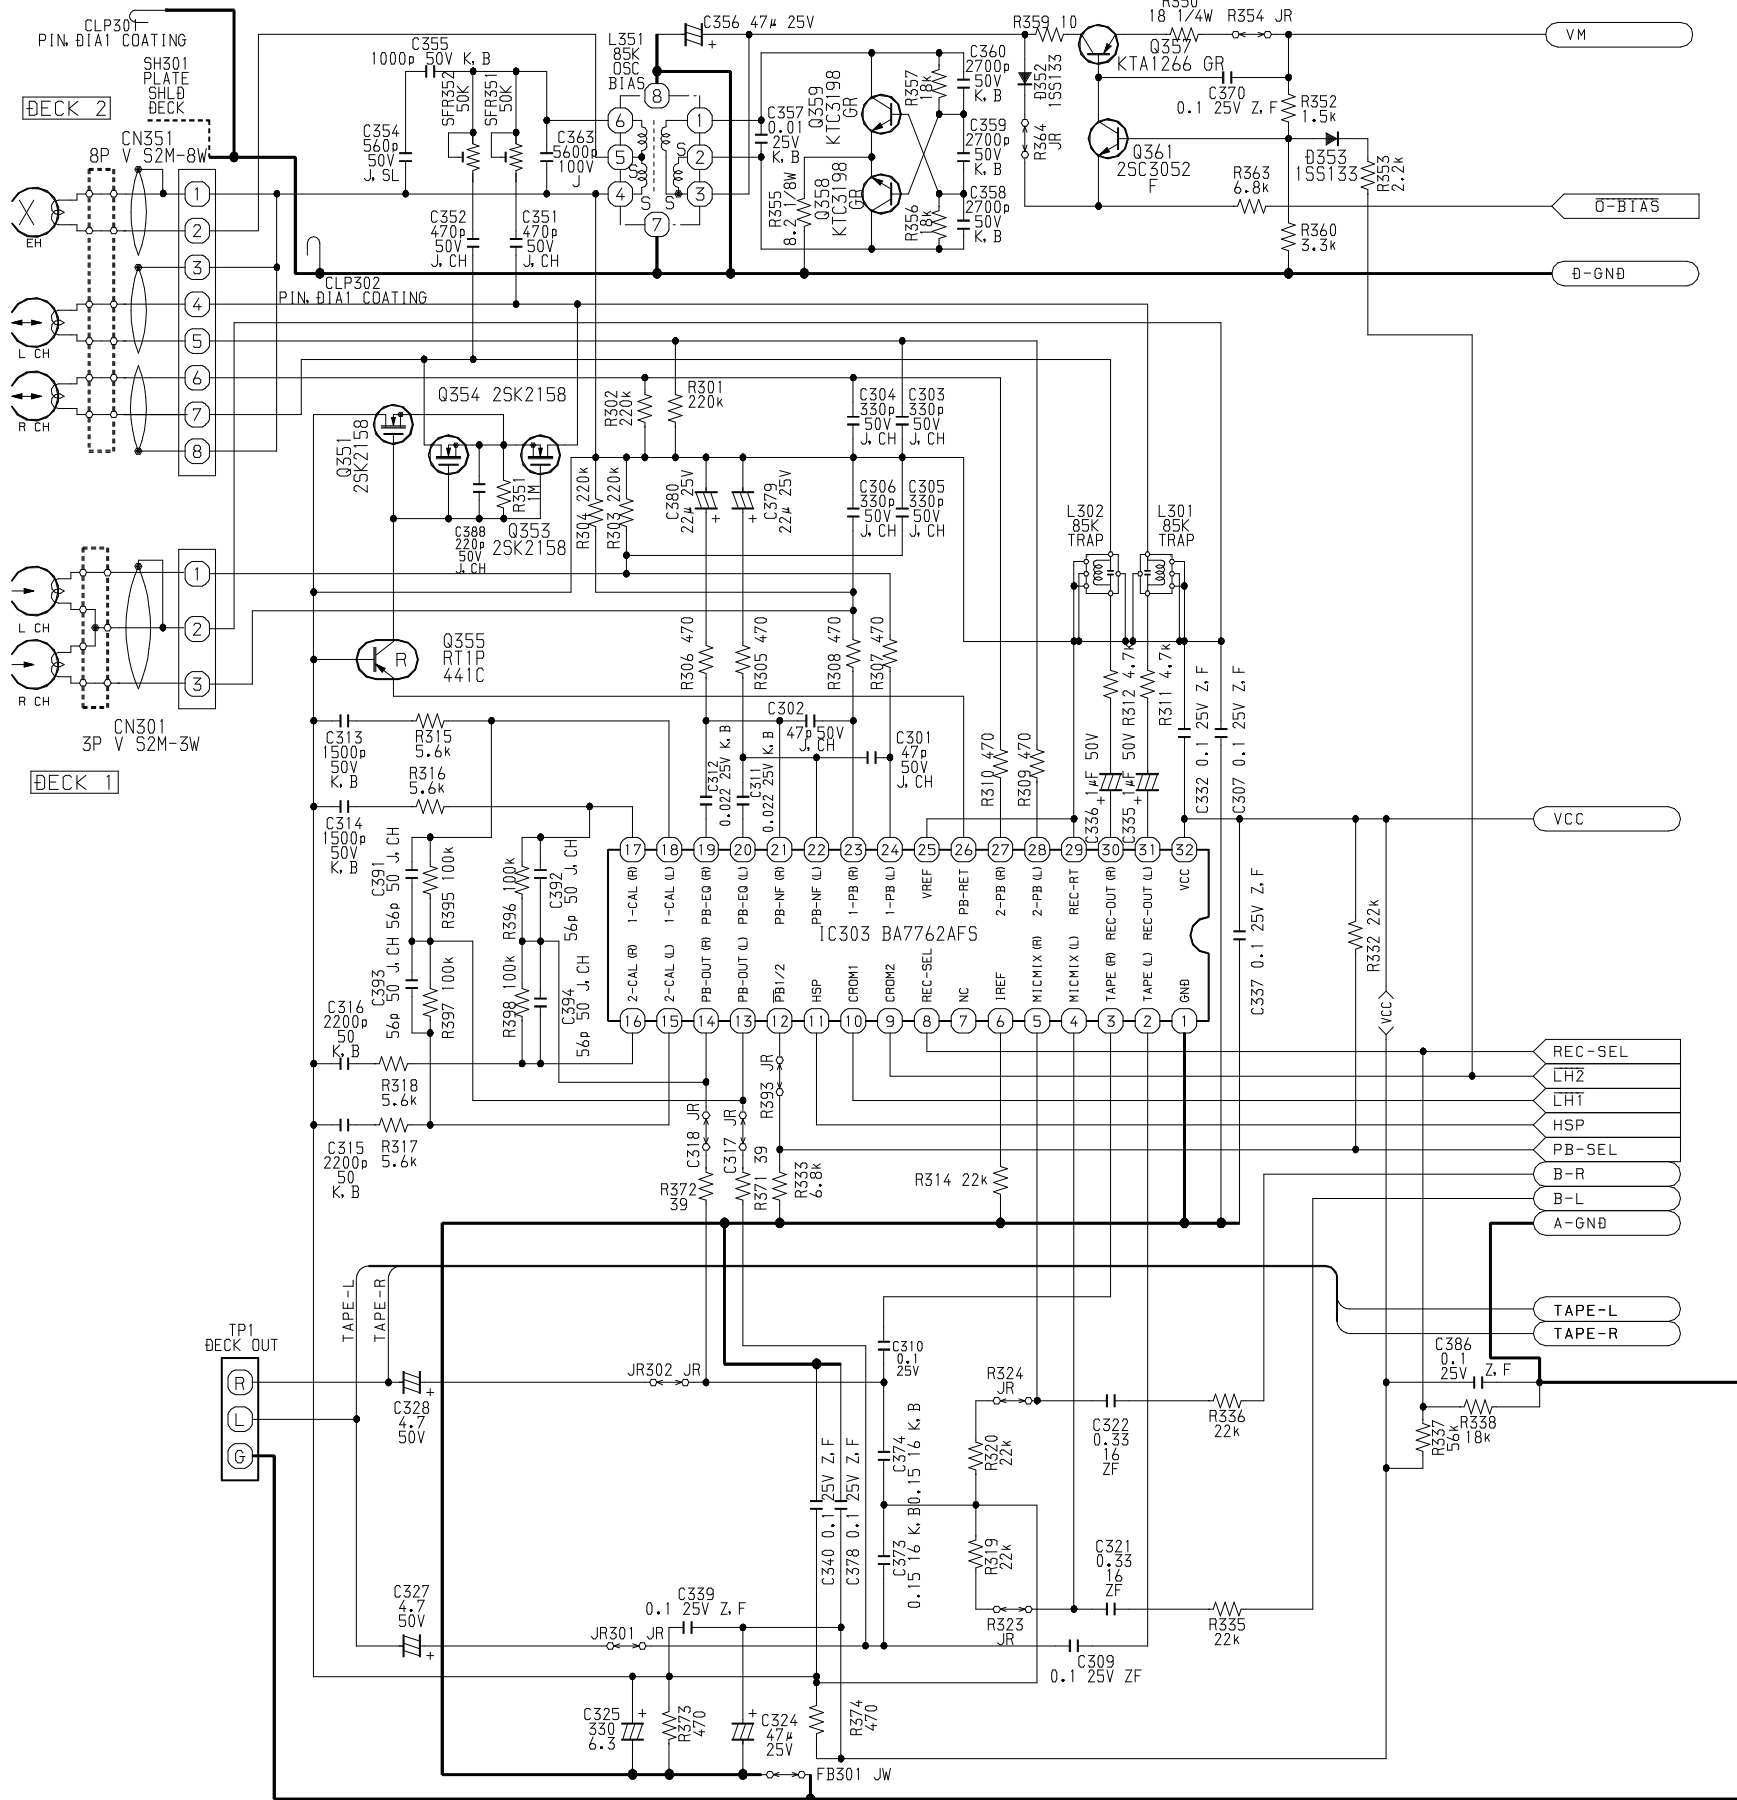

SCHEMATIC DIAGRAM (DECK)

8A DJV 630 01

C0000663


ADJ-28 U

CX-NØV526

15 MAY 2000


<sup>K</sup>B-A DJ-28 MAIN-B-A DJ-28 MAIN-U (P2)

SCHEMATIC DIAGRAM – 3 (MAIN : 3/4 <TUNER SECTION>)

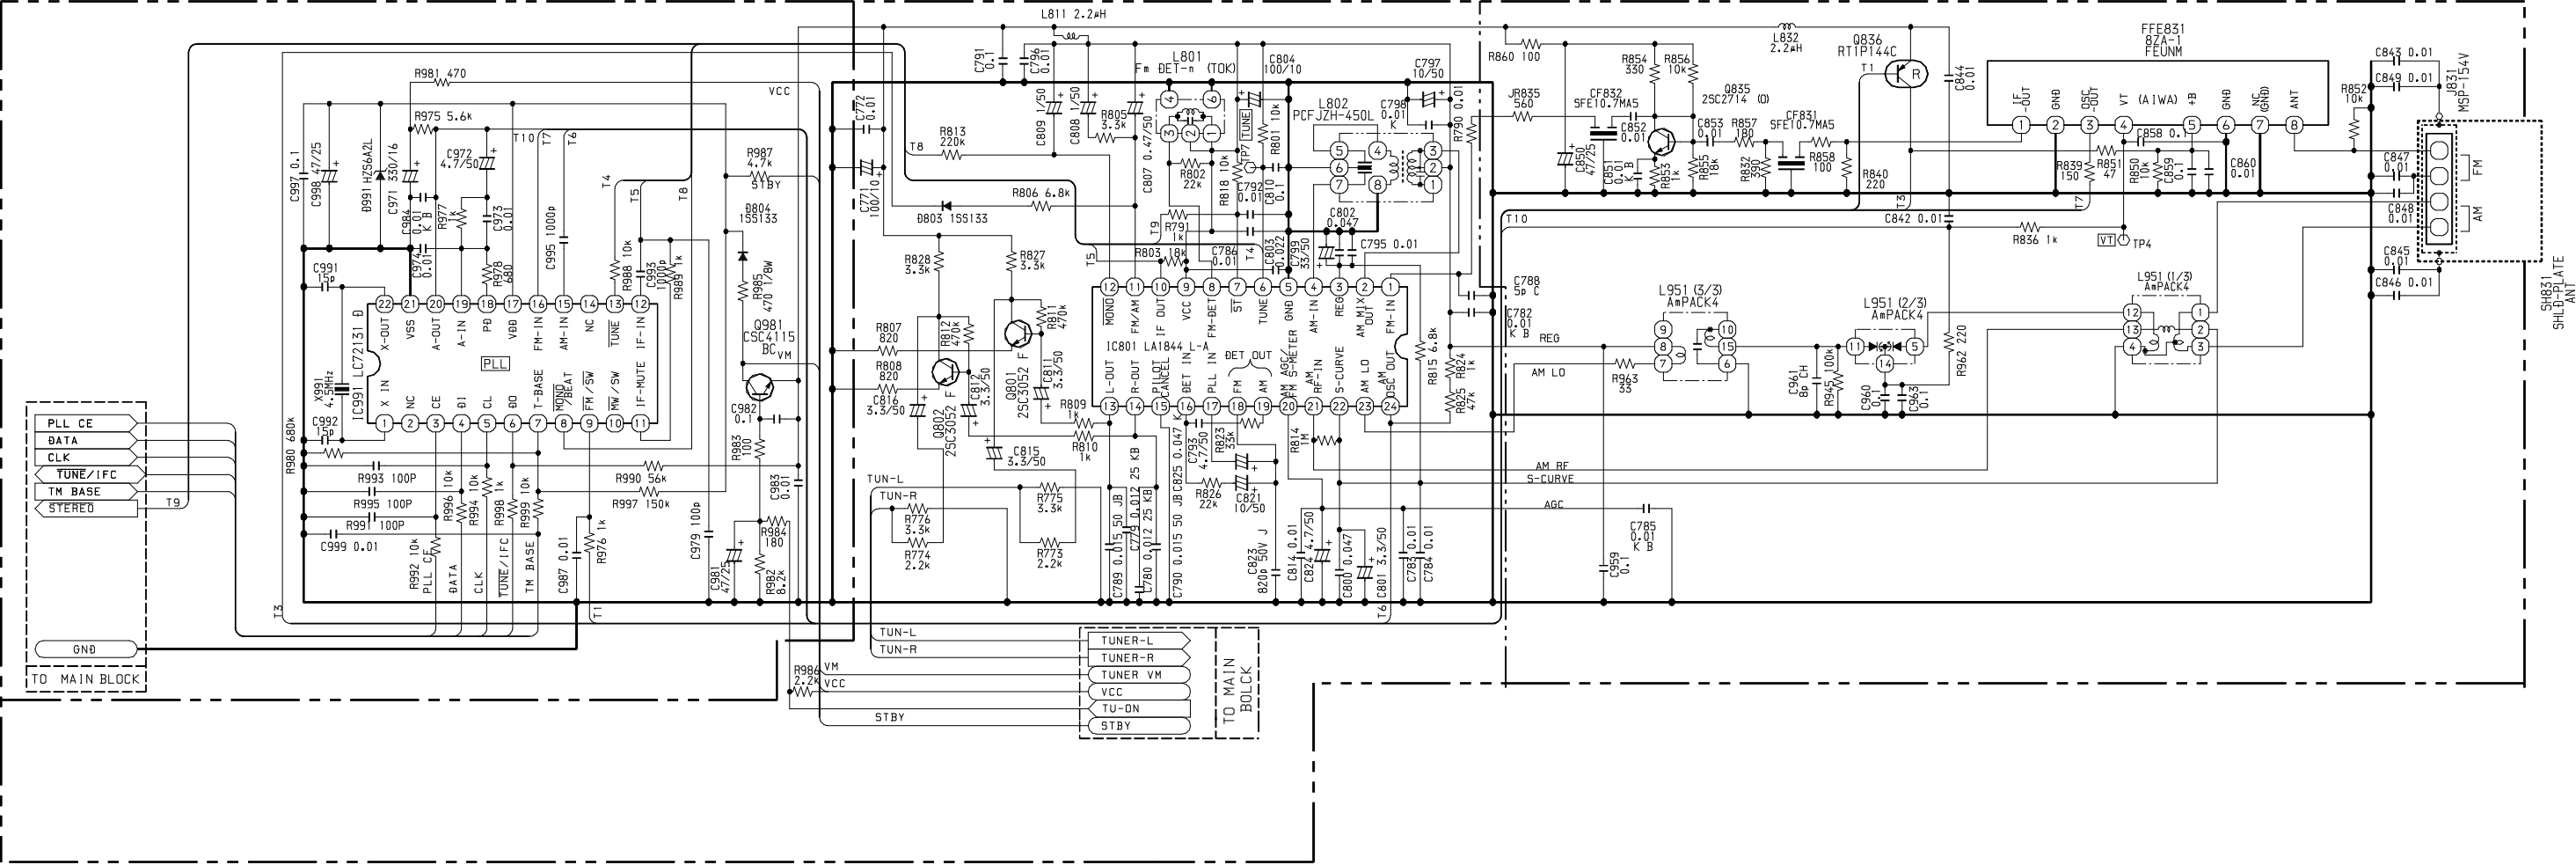

B-ADJ-28MAIN-U (P4)

B - A D J - 2 8 M A I N - U (P3)



8A DJV 630 01


C0000664

A0J-28 U

CX-NØV526


06 JUN 2000

SCHEMATIC DIAGRAM – 5 (FRONT)

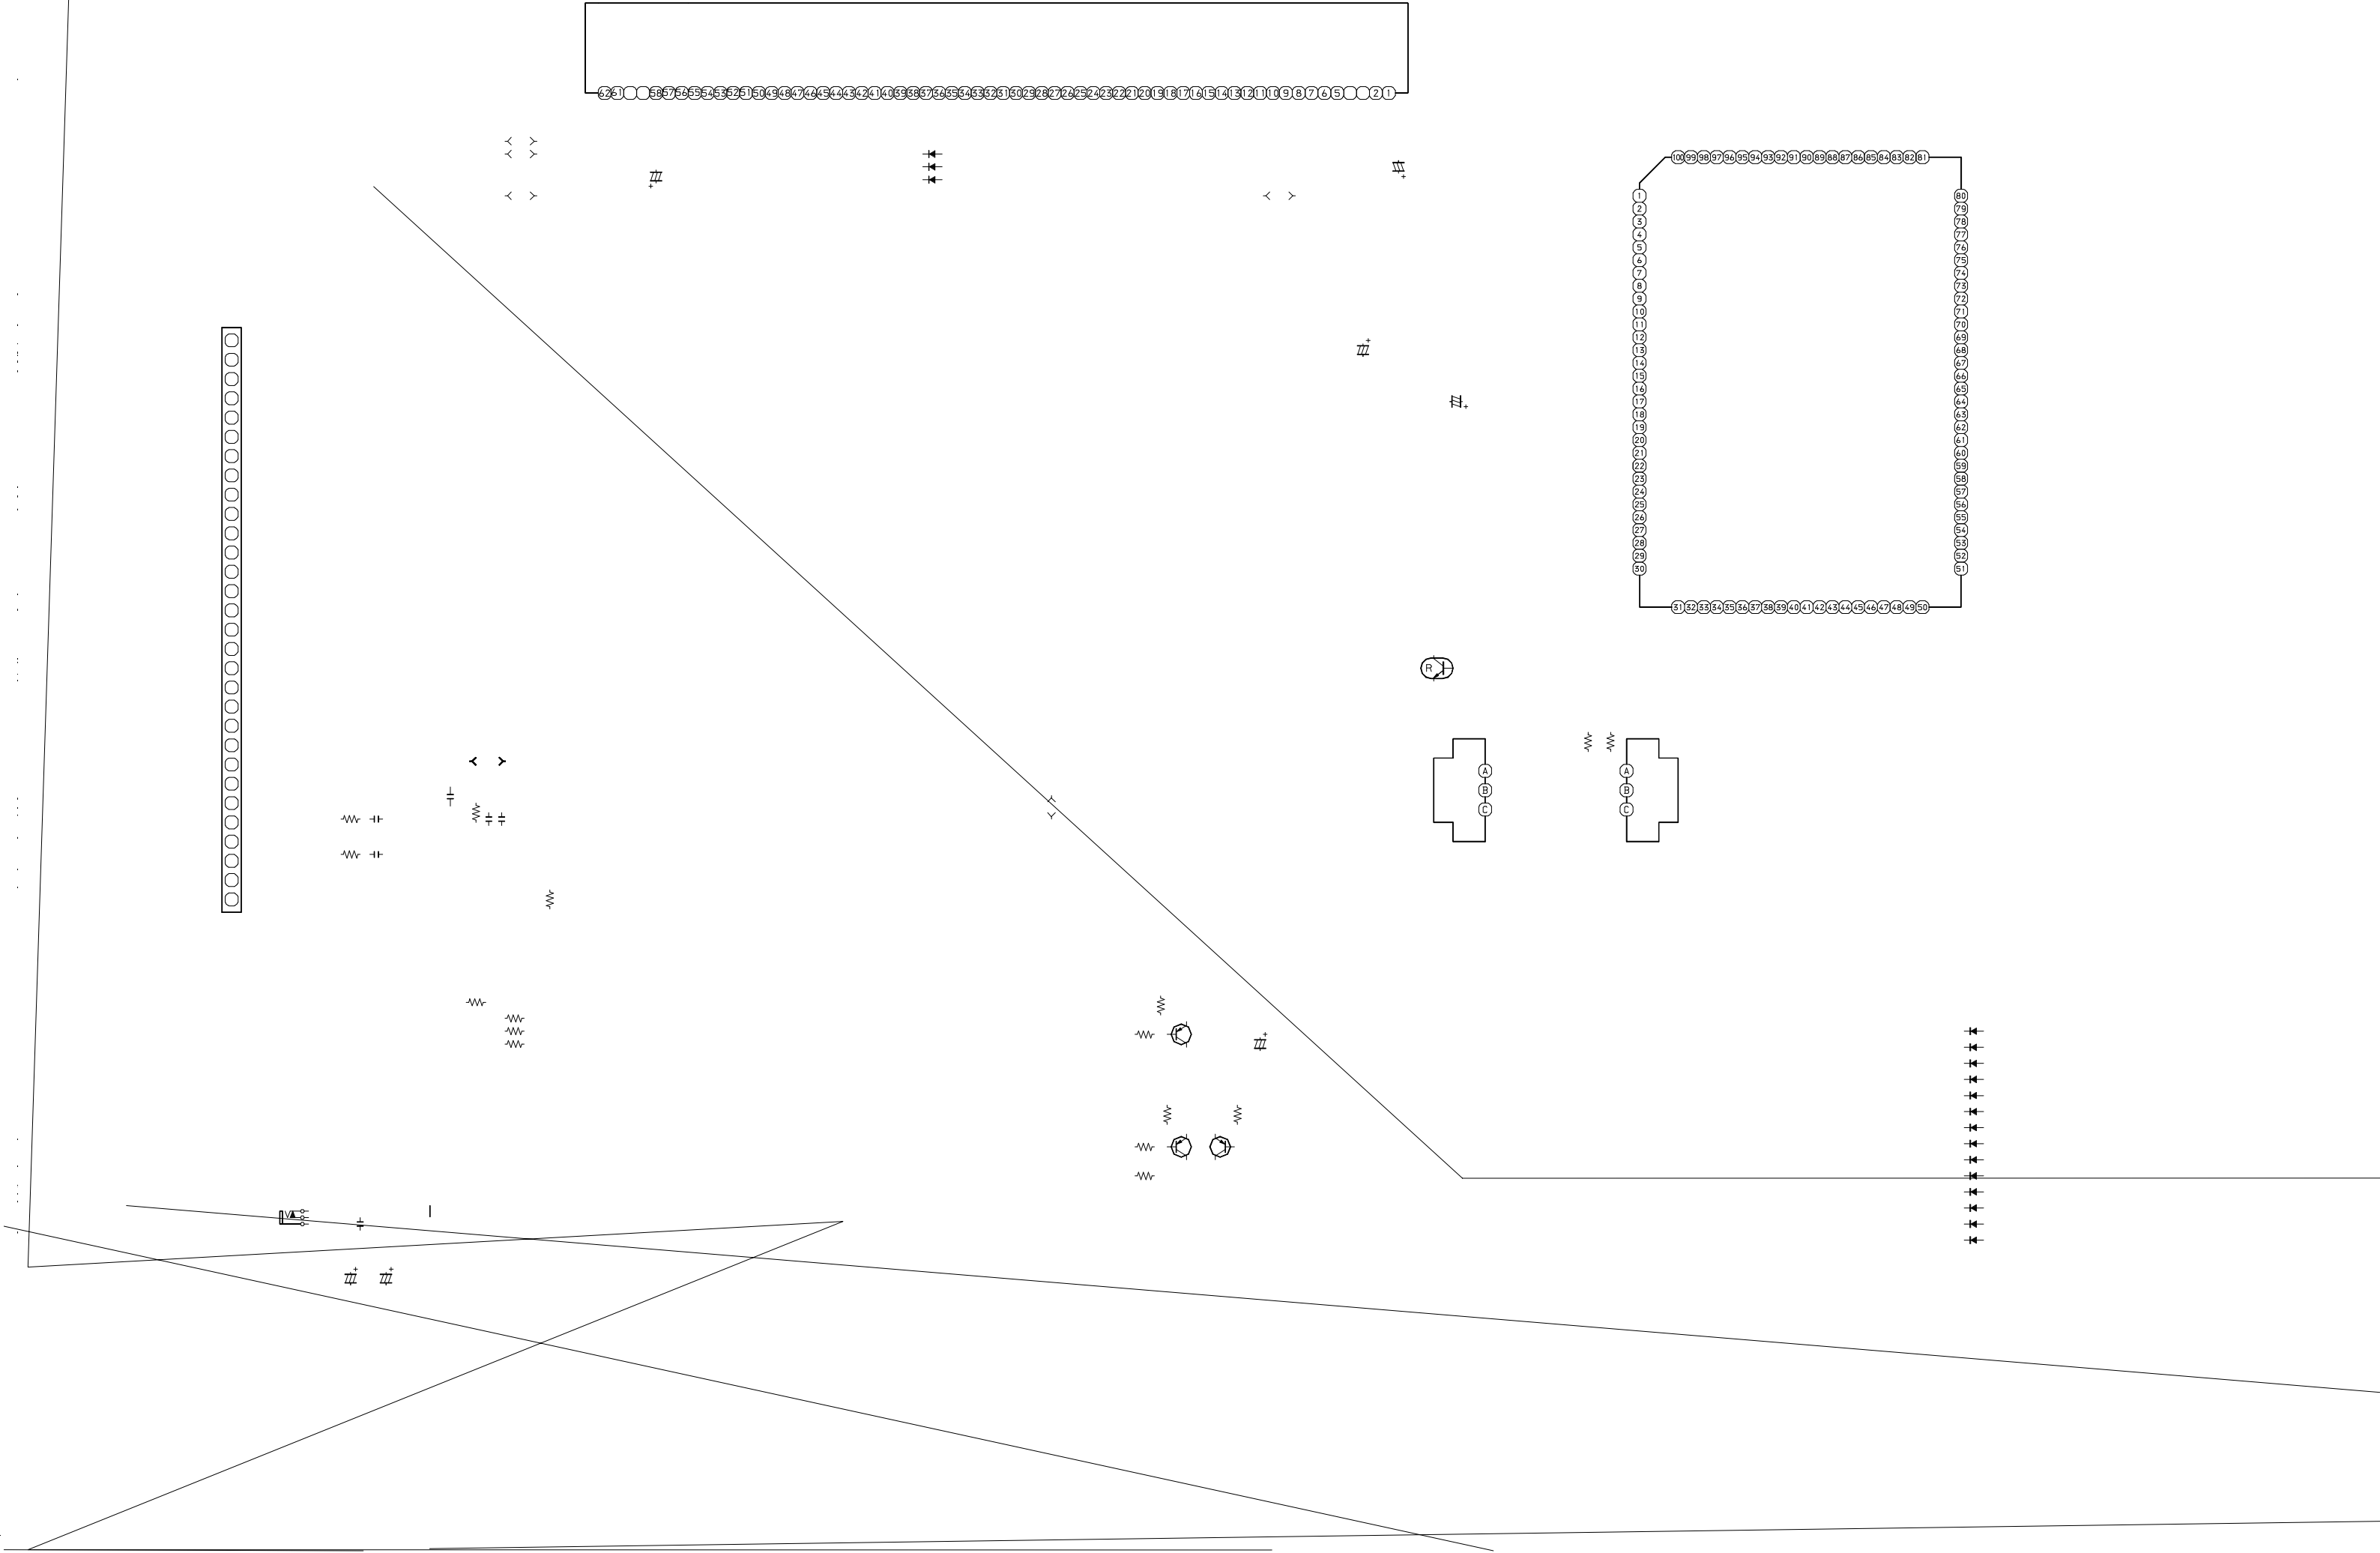




SCHEMATIC DIAGRAM – 6 (AMP 1F)

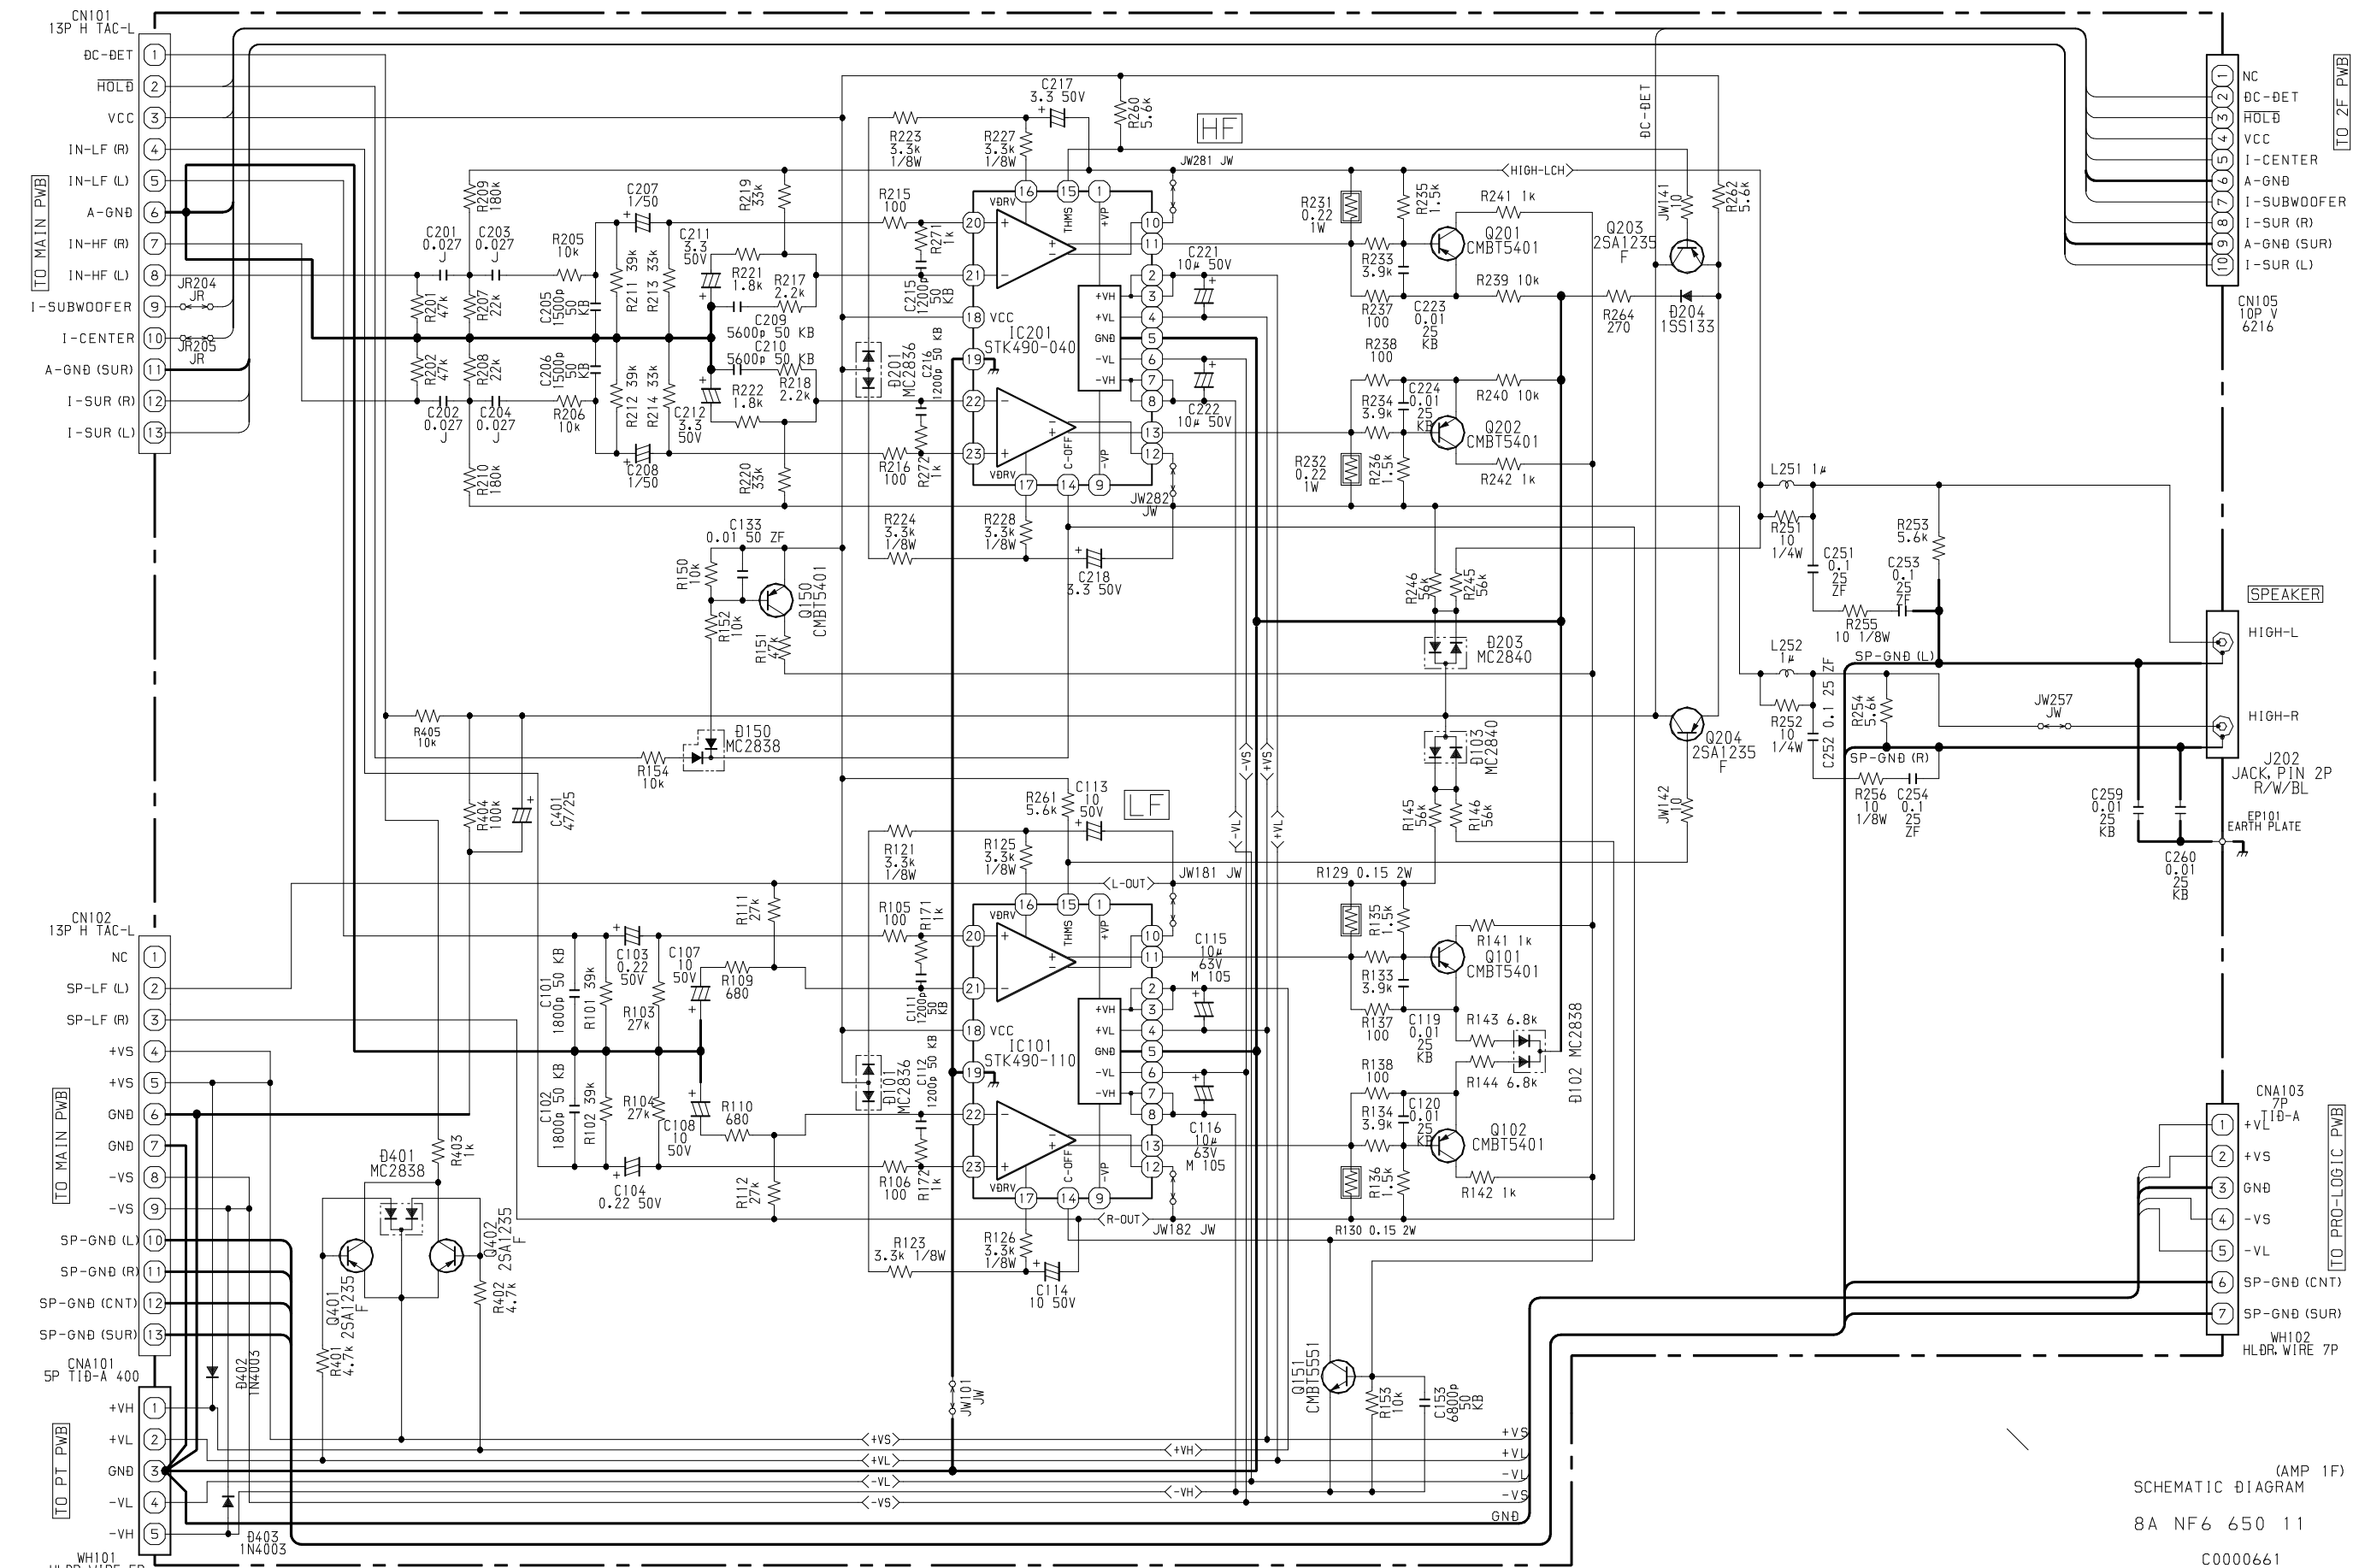

B-A 0 J-28 AMP 1F-UP 1

SCHEMATIC DIAGRAM – 7 (AMP PROLOGIC)

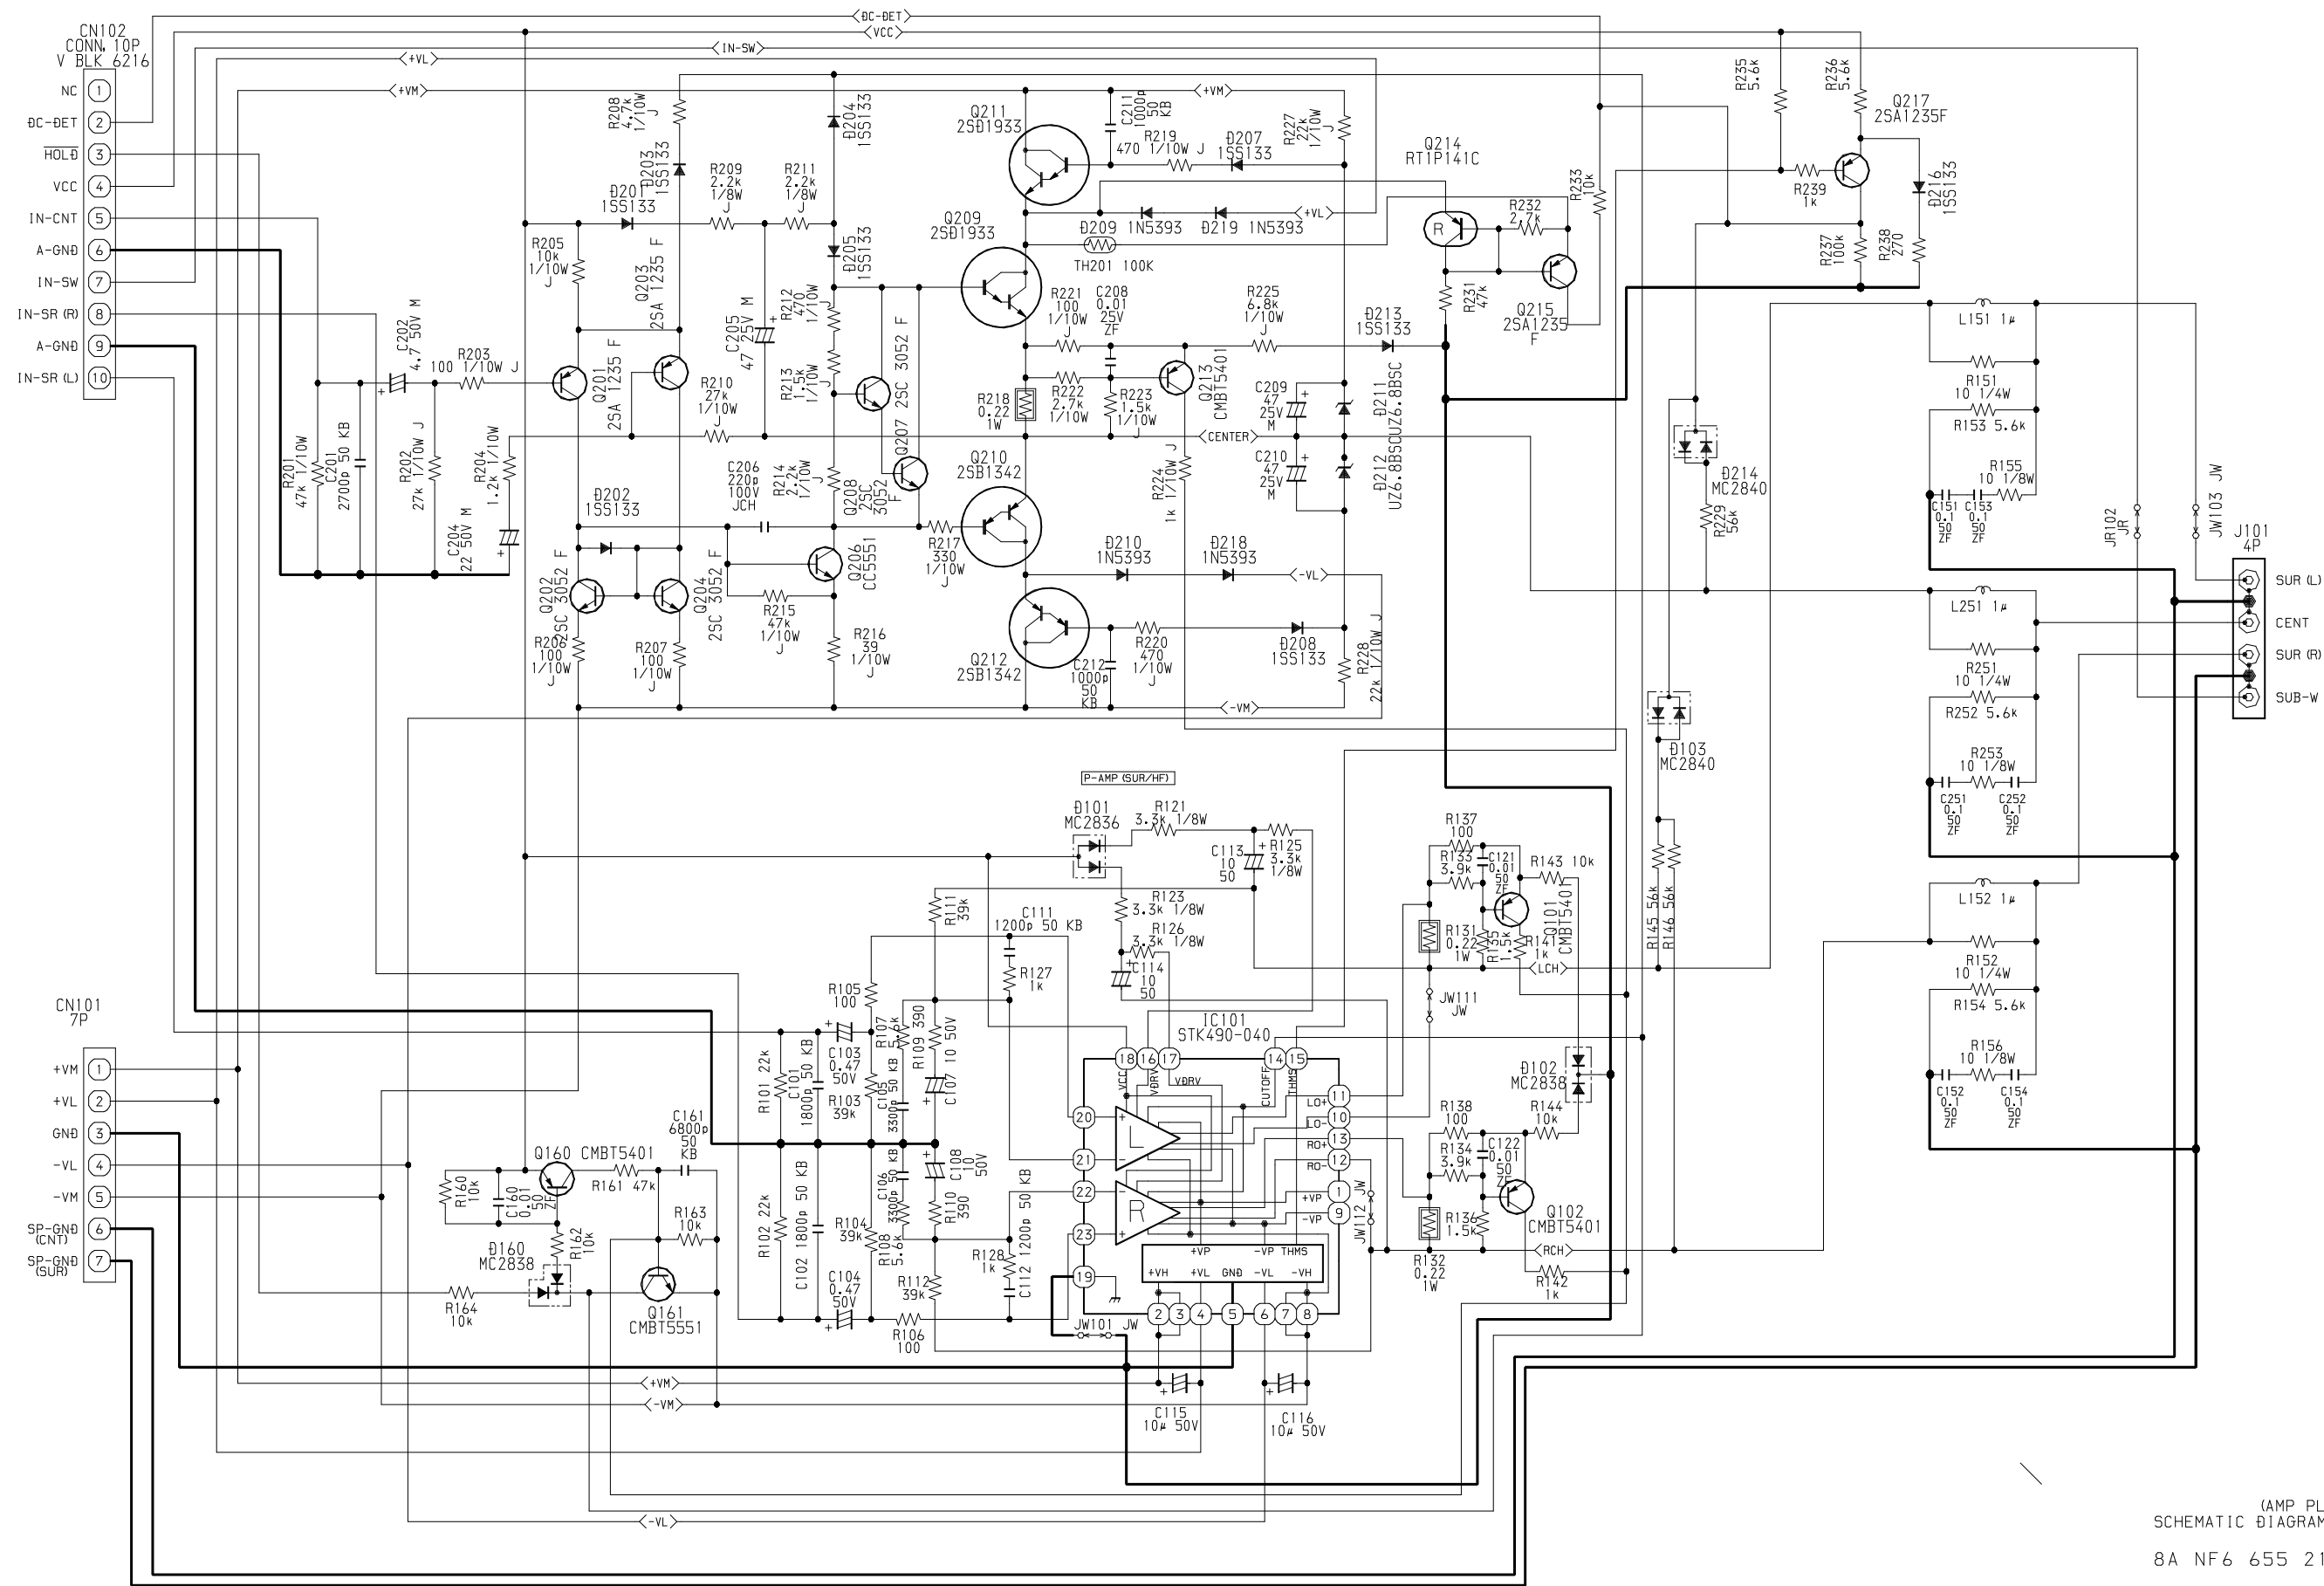

(AMP PLOGIC)  
SCHEMATIC DIAGRAM

8A NF6 655 21

C0000660


CX-NBV526

15 MAY 2000

B-A 0 J-28 AMP P-LOGIC-U . P 1

ABJ-28 U

SCHEMATIC DIAGRAM-8 (PT)

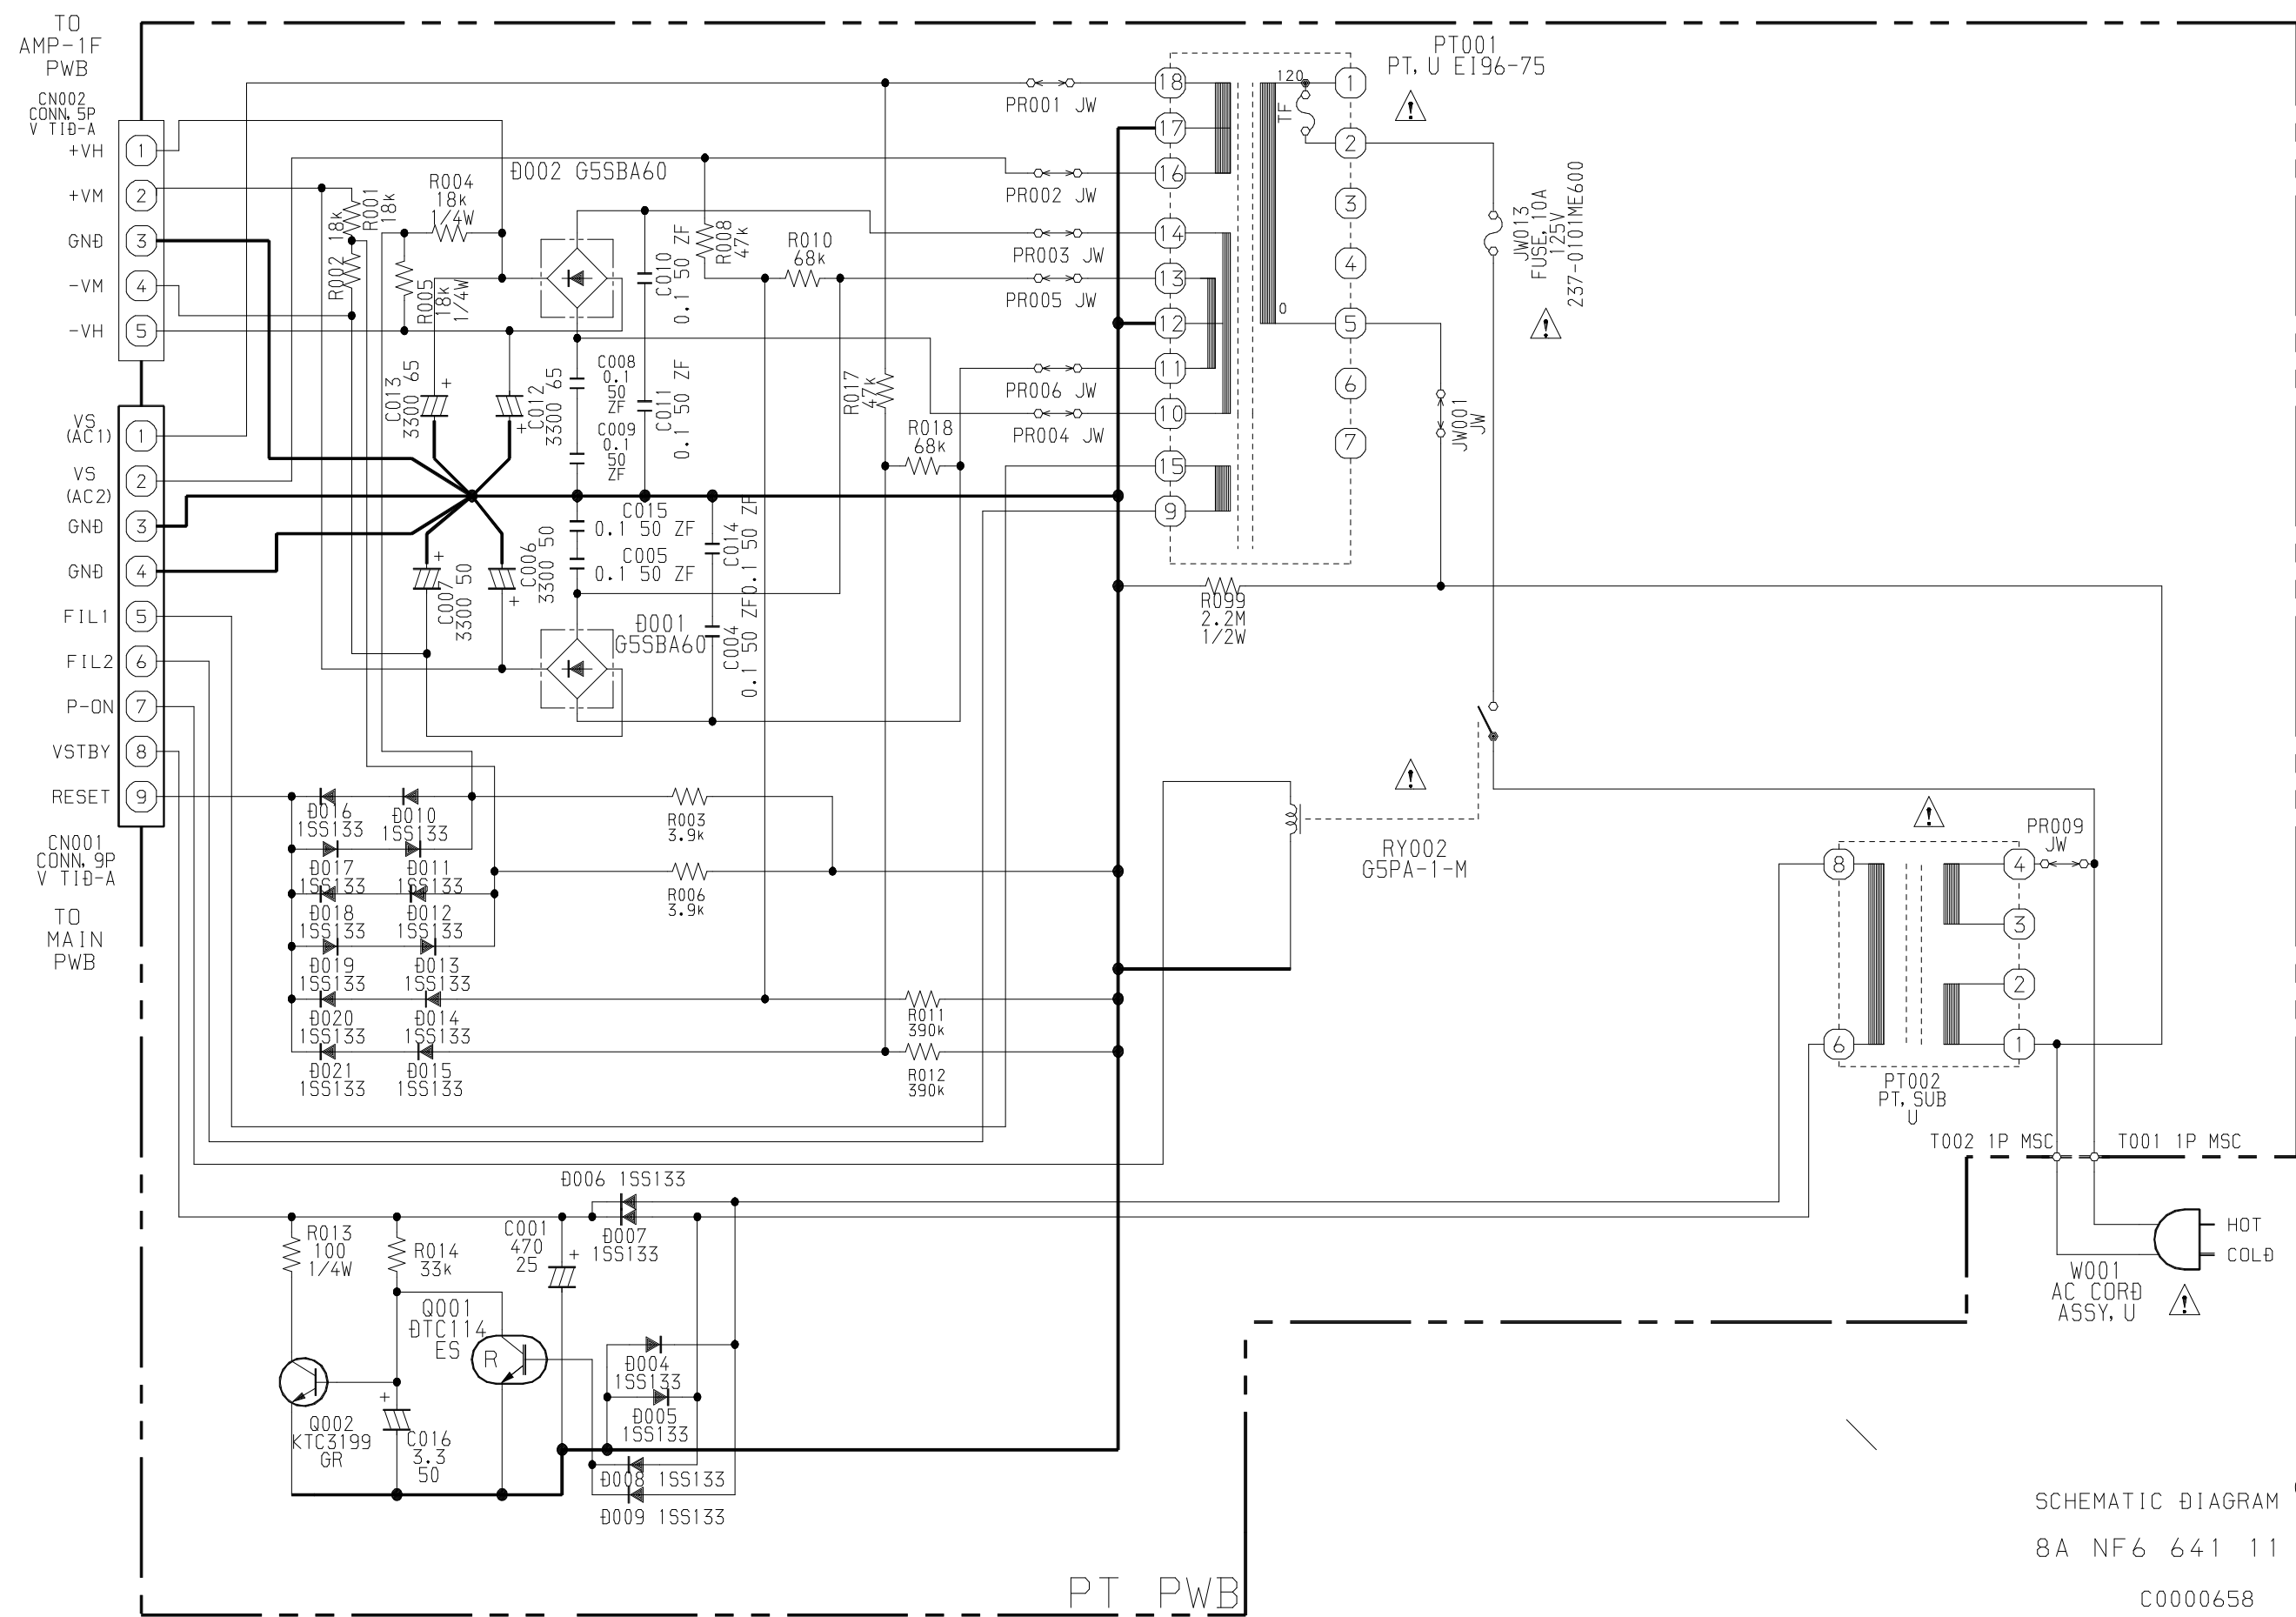

SCHEMATIC DIAGRAM (PT)

8A NF6 641 11

C0000658

CX-N0V526

15 MAY 2000

ABJ-28 U

B-ABJ-28PT-U.P1 B-ABJ-28PT-U

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)  
**AIWA CO.,LTD.** 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111